



32-125/1.1 (1.1kW) MEI > 0.40 – impeller diameter = 133 mm

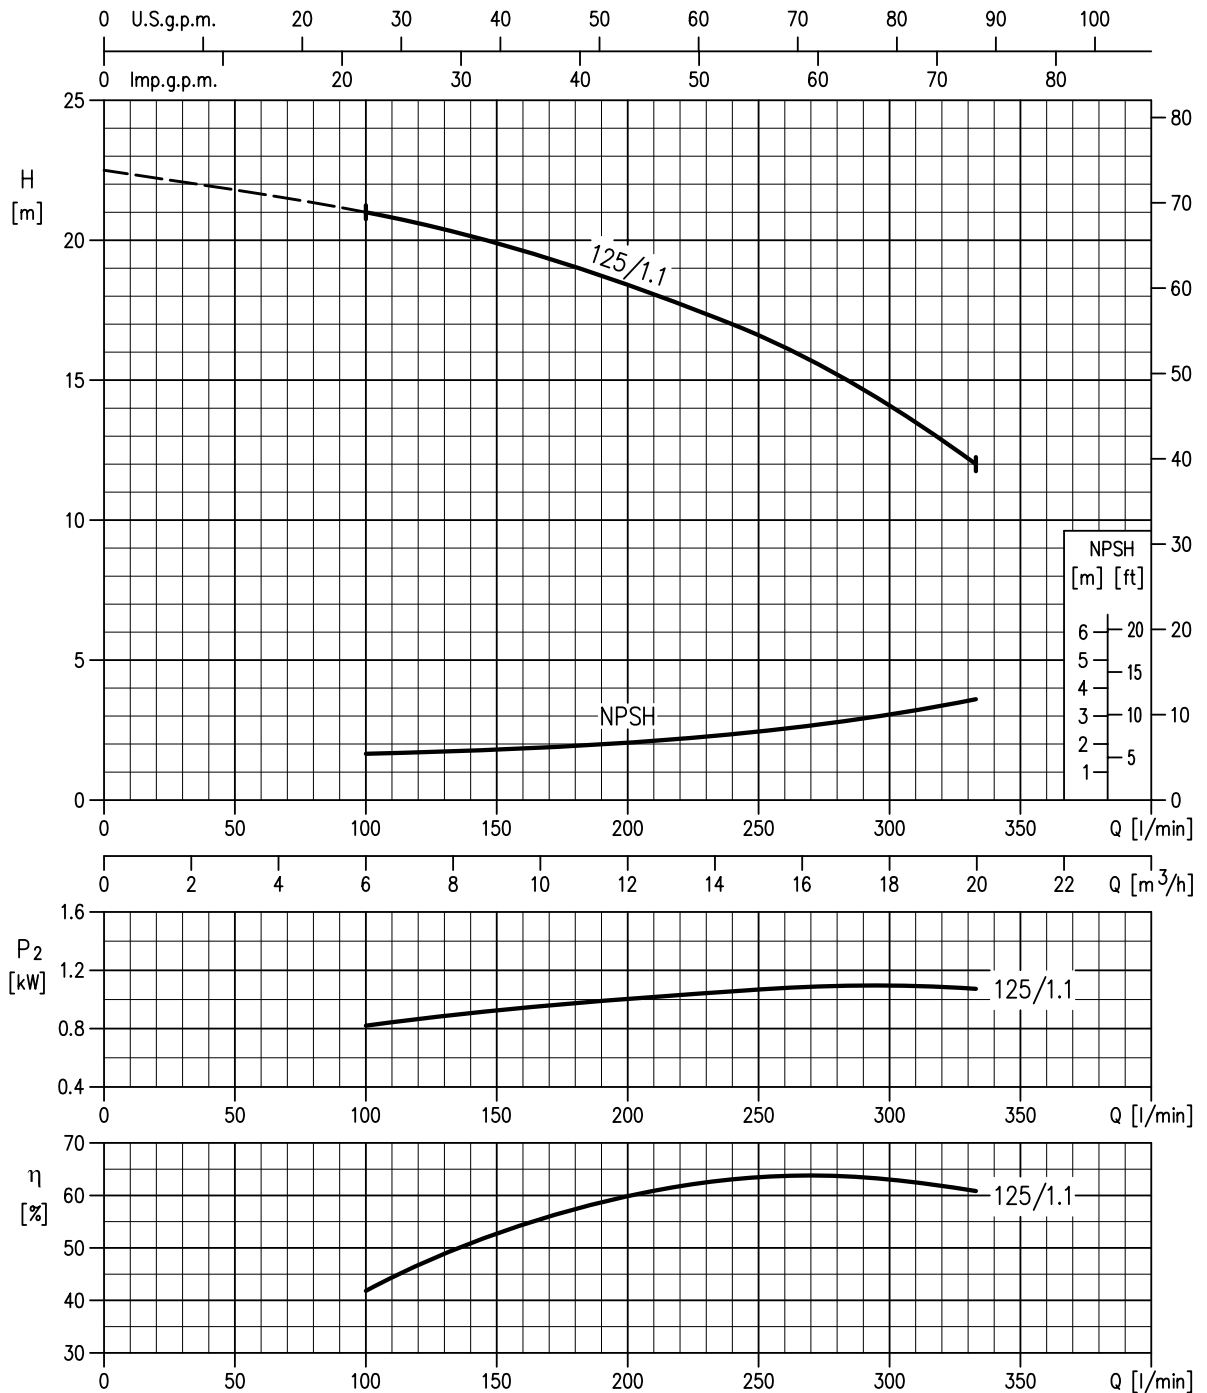


Rotation speed ≈ 2900 min<sup>-1</sup>  
 Test standard: ISO 9906:2012 - Grade 3B

32-160/1.5 (1.5kW) MEI > 0.70 – impeller diameter = 151 mm  
 32-160/2.2 (2.2kW) MEI > 0.70 – impeller diameter = 166 mm

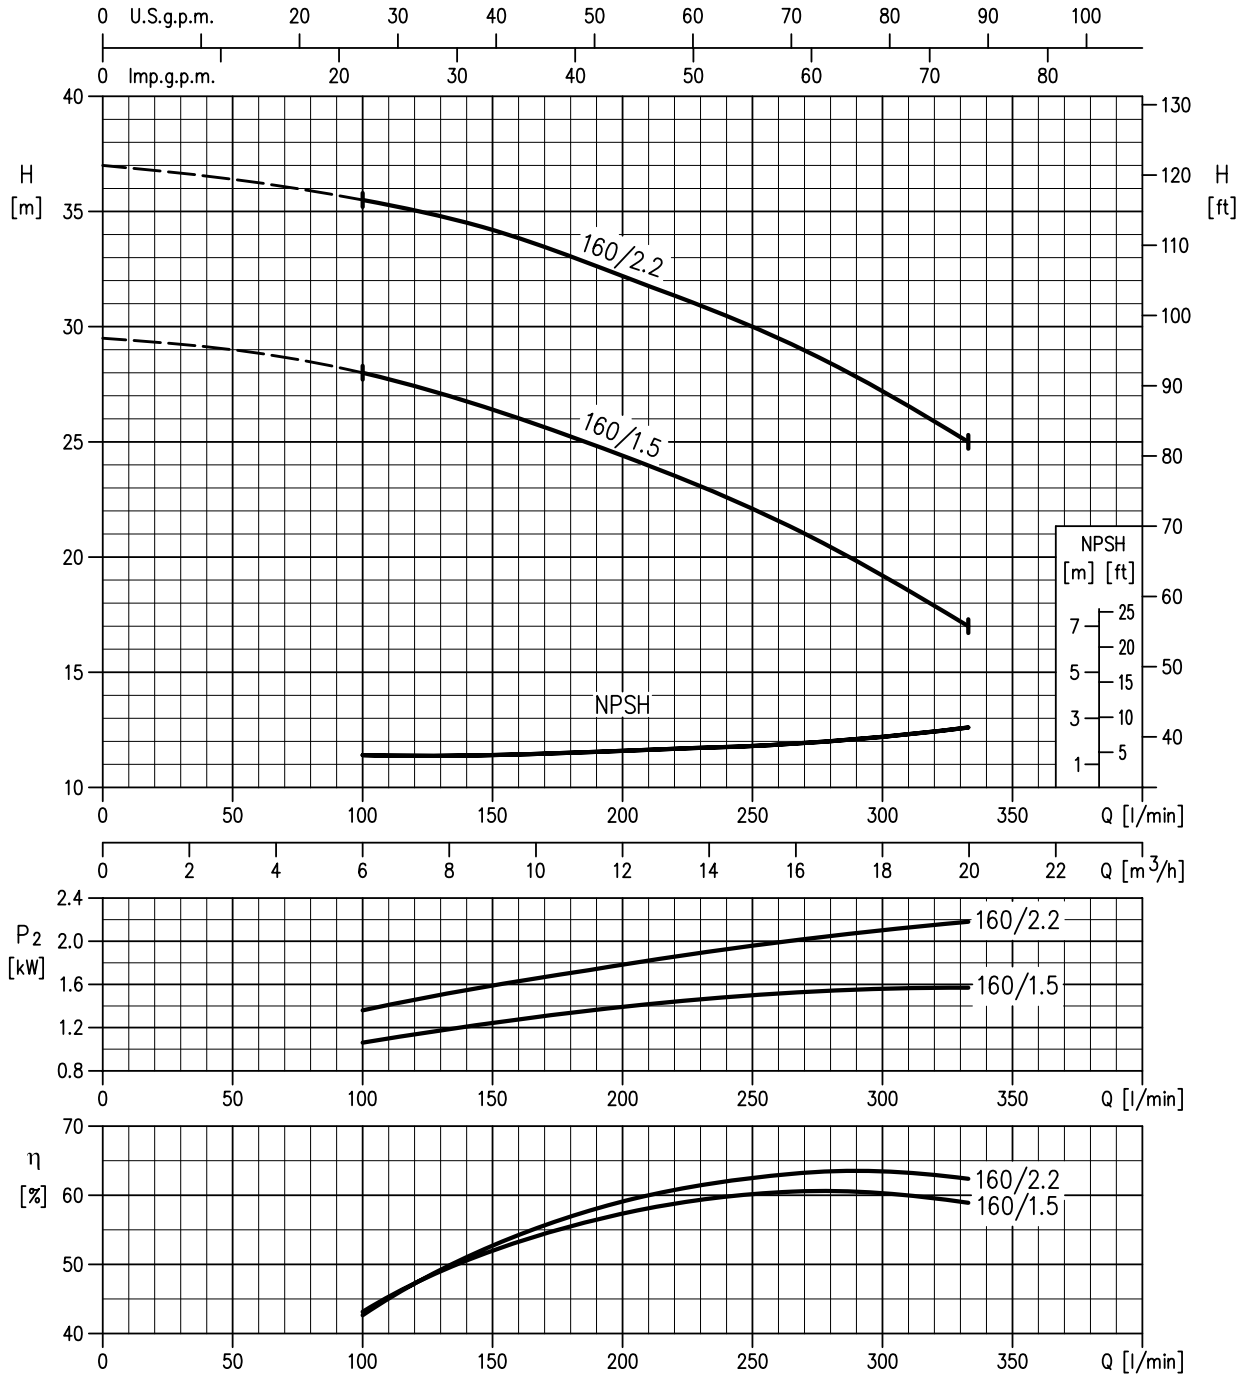


Rotation speed ≈ 2900 min<sup>-1</sup>  
 Test standard: ISO 9906:2012 - Grade 3B

32-200/3 (3.0kW) MEI > 0.70 – impeller diameter = 186 mm  
 32-200/4 (4.0kW) MEI > 0.70 – impeller diameter = 200 mm  
 32-200/5.5 (5.5kW) MEI > 0.70 – impeller diameter = 224 mm  
 32-200/7.5 (7.5kW) MEI > 0.70 – impeller diameter = 224 mm

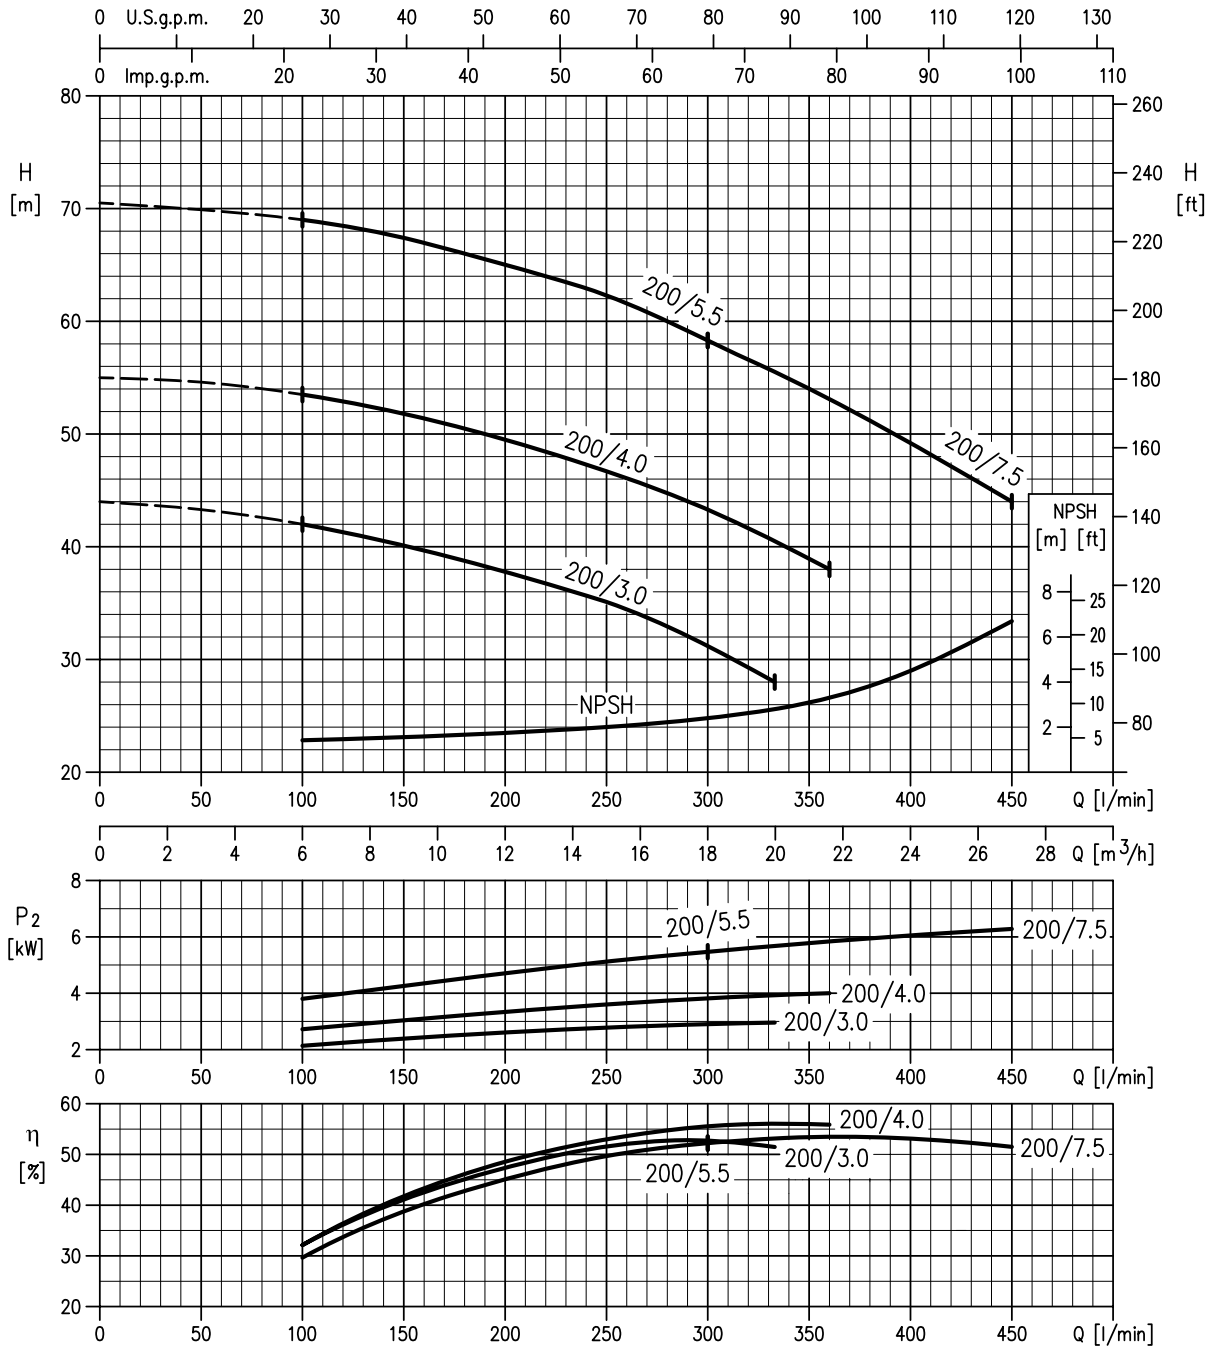


Rotation speed ≈ 2900 min<sup>-1</sup>  
 Test standard: ISO 9906:2012 - Grade 3B

40-125/1.5 (1.5kW) MEI > 0.70 – impeller diameter = 125 mm  
 40-125/2.2 (2.2kW) MEI > 0.70 – impeller diameter = 140 mm

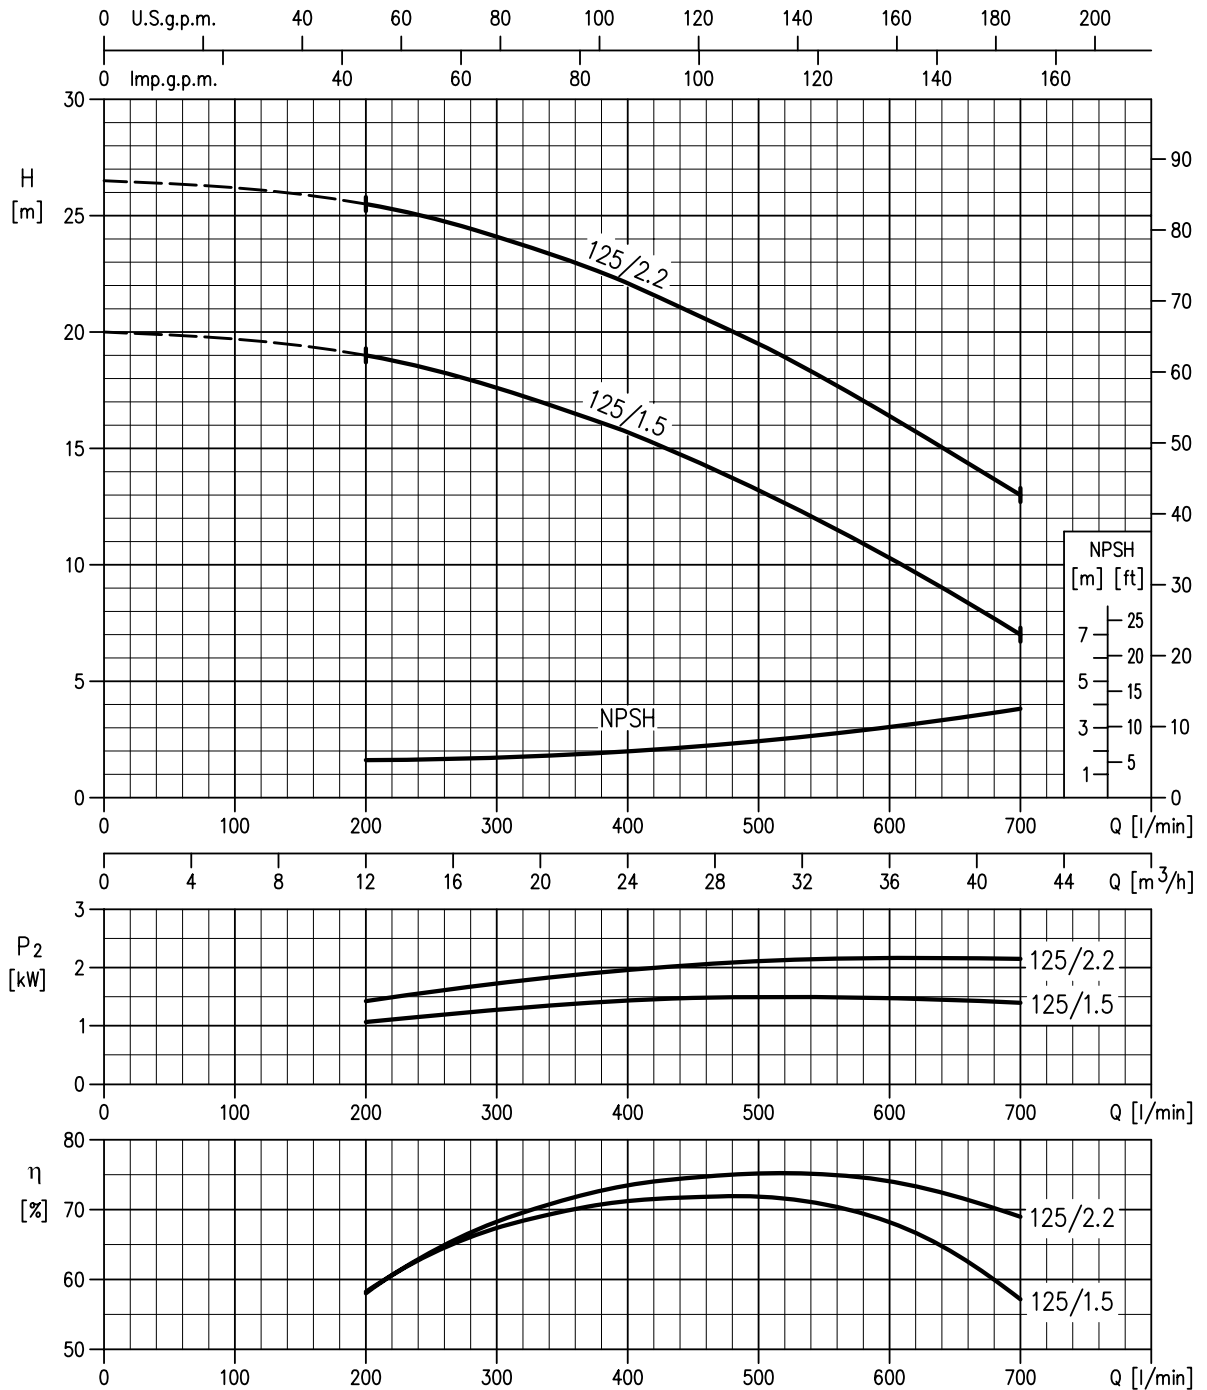

Rotation speed ≈ 2900 min<sup>-1</sup>  
 Test standard: ISO 9906:2012 - Grade 3B

40-160/3 (3.0kW) MEI > 0.70 – impeller diameter = 151 mm  
 40-160/4 (4.0kW) MEI > 0.70 – impeller diameter = 166 mm

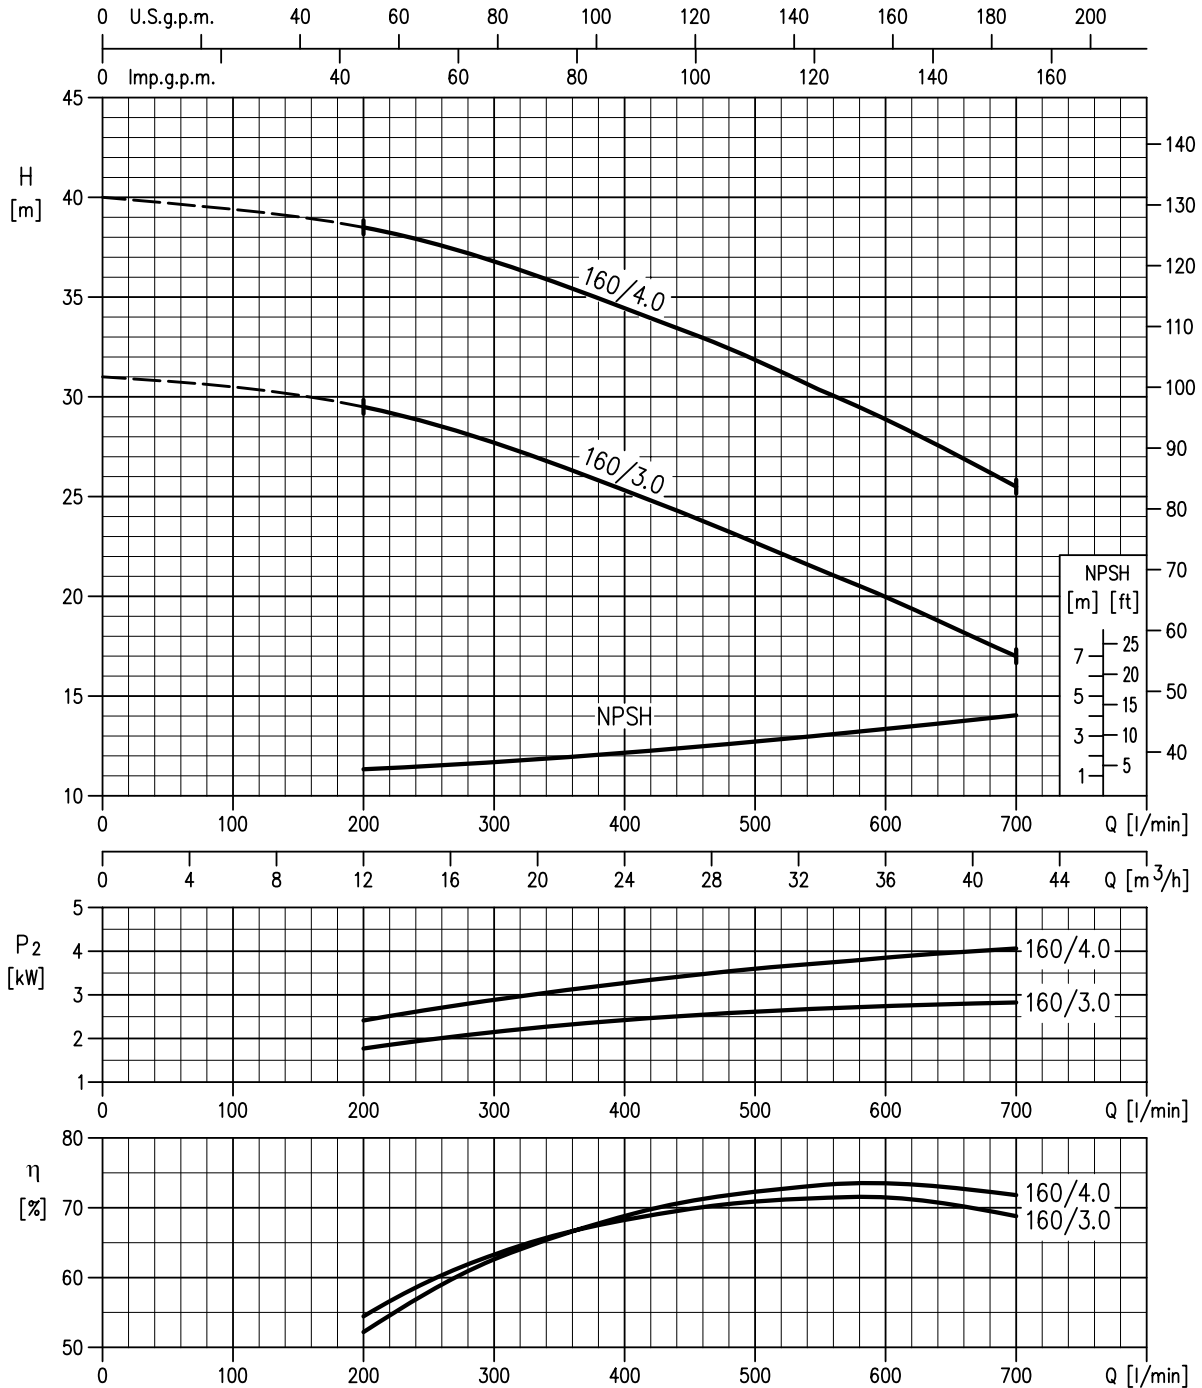


Rotation speed ≈ 2900 min<sup>-1</sup>  
 Test standard: ISO 9906:2012 - Grade 3B

PERFORMANCE CURVE

50Hz

Rev. V

40-200/5.5 (5.5kW) MEI > 0.70 – impeller diameter = 183 mm  
 40-200/7.5 (7.5kW) MEI > 0.70 – impeller diameter = 200 mm  
 40-200/11 (11kW) MEI > 0.70 – impeller diameter = 224 mm

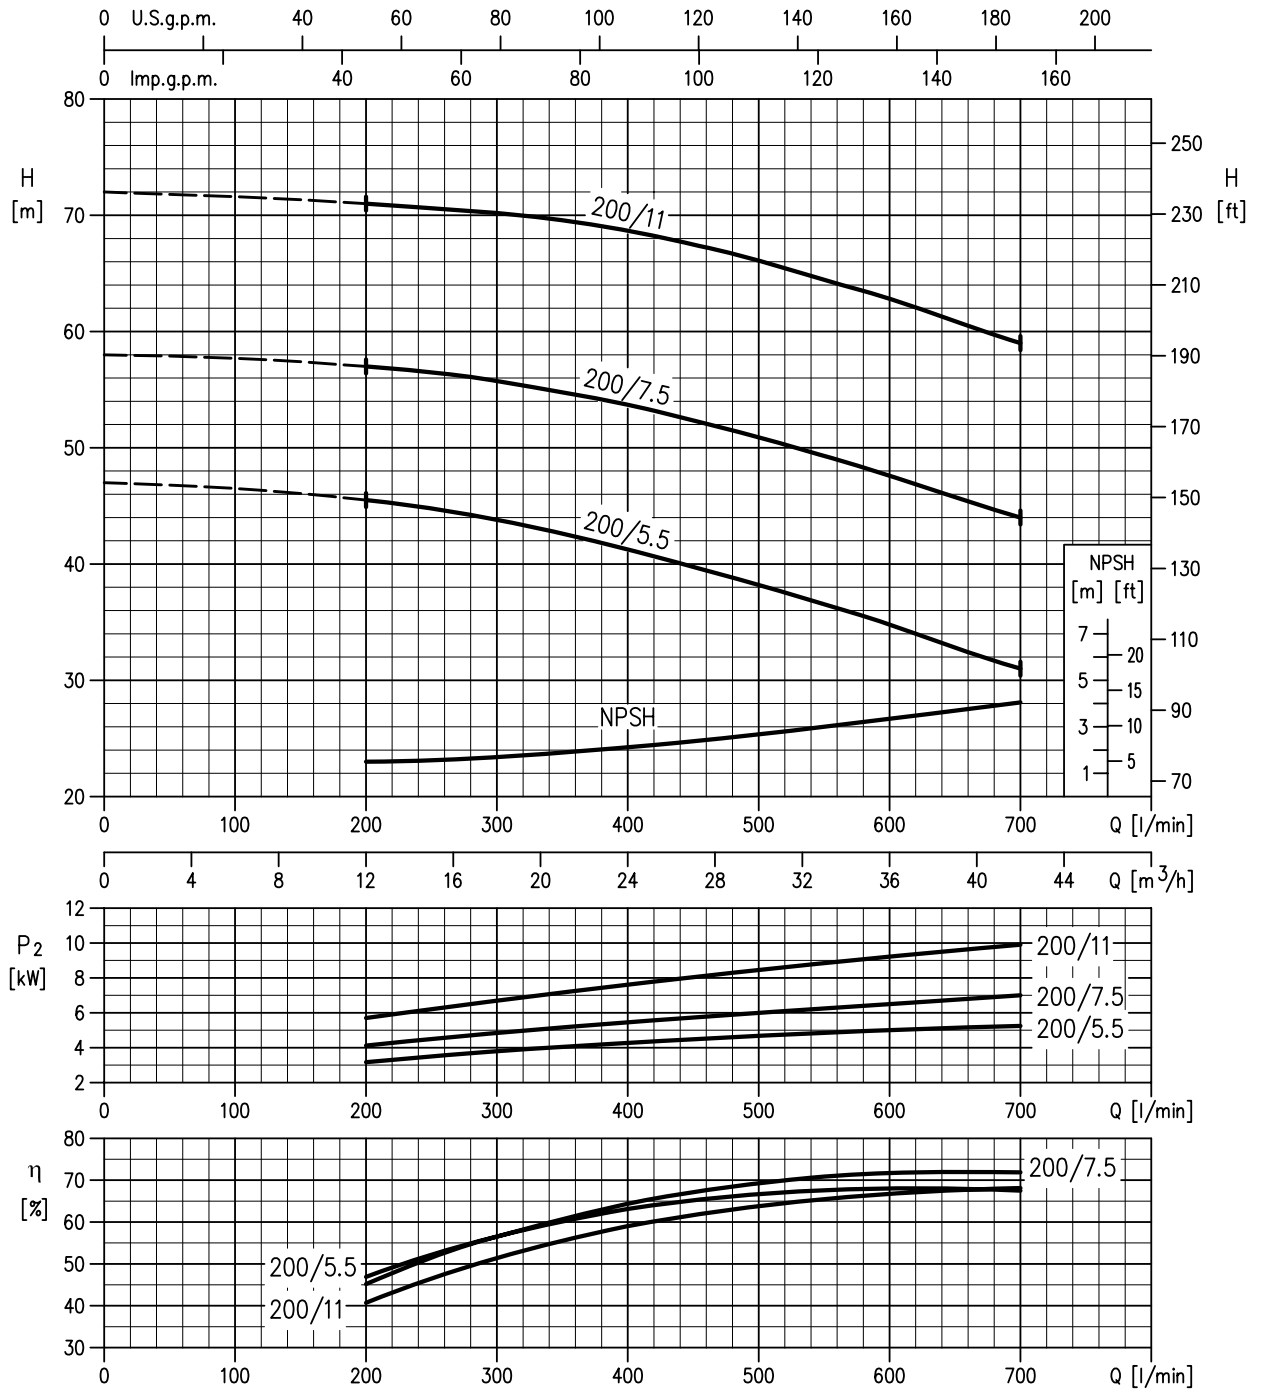


Rotation speed ≈ 2900 min<sup>-1</sup>  
 Test standard: ISO 9906:2012 - Grade 3B

PERFORMANCE CURVE

50Hz


Rev. V

50-125/2.2 (2.2kW) MEI > 0.50 – impeller diameter = 126 mm  
 50-125/3 (3.0kW) MEI > 0.50 – impeller diameter = 131 mm  
 50-125/4 (4.0kW) MEI > 0.50 – impeller diameter = 140 mm

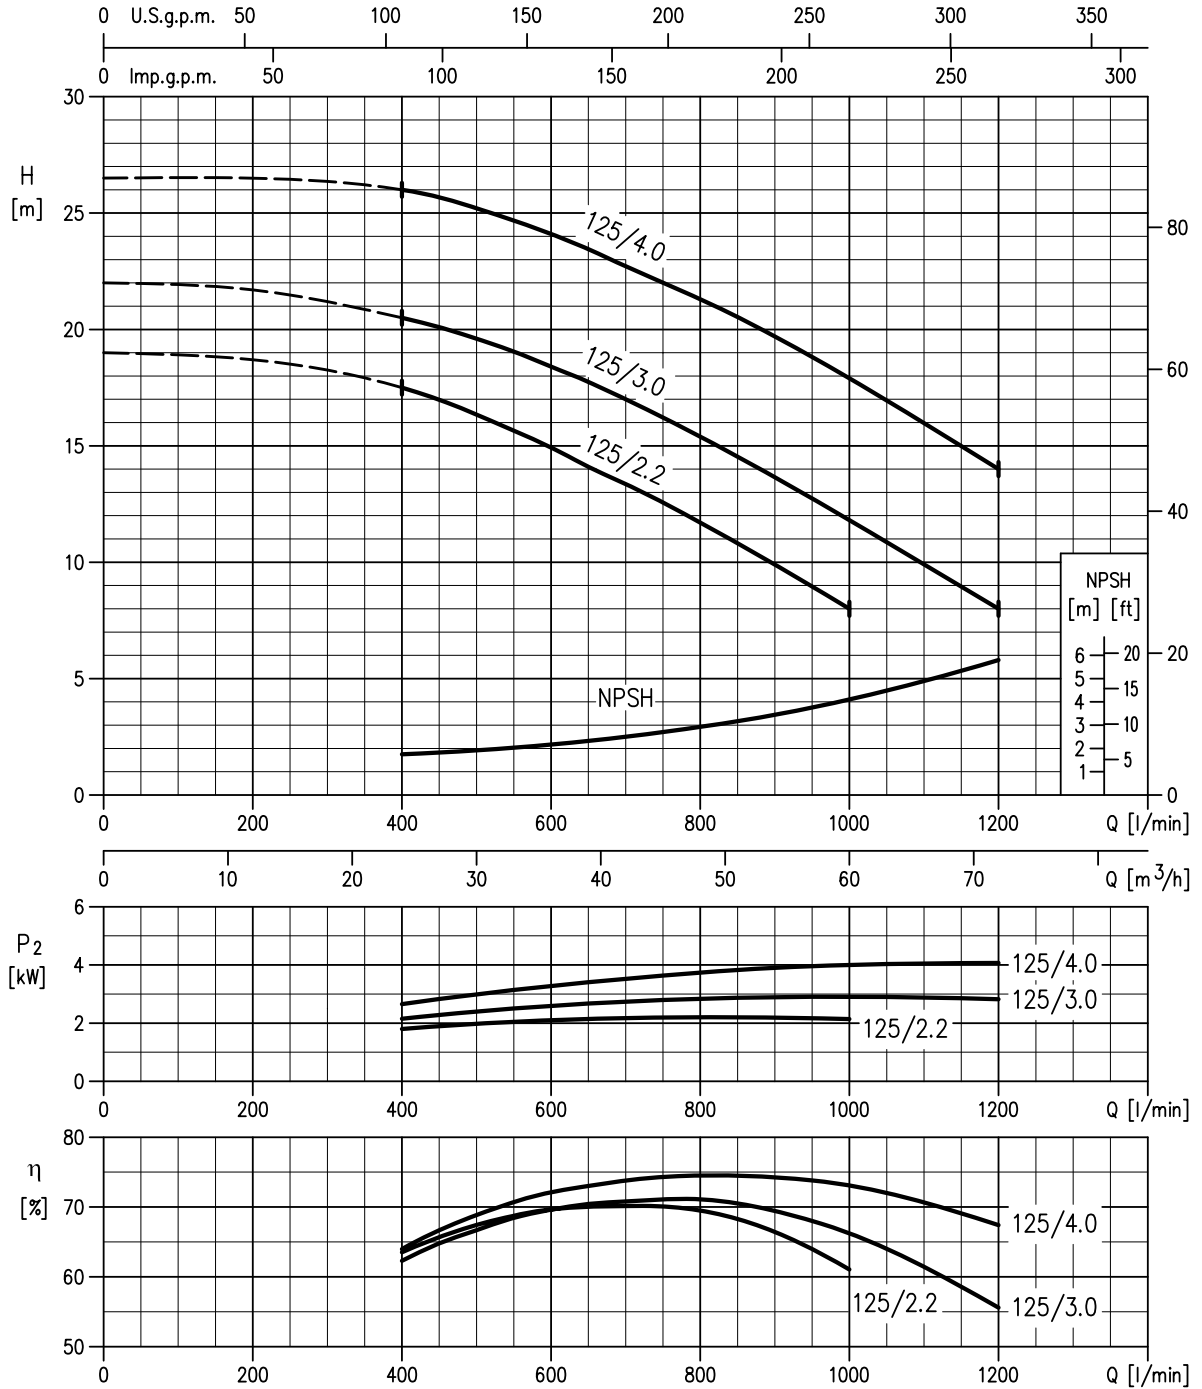

Rotation speed ≈ 2900 min<sup>-1</sup>  
 Test standard: ISO 9906:2012 - Grade 3B


50-160/5.5 (5.5kW) MEI > 0.40 – impeller diameter = 154 mm  
 50-160/7.5 (7.5kW) MEI > 0.40 – impeller diameter = 166 mm

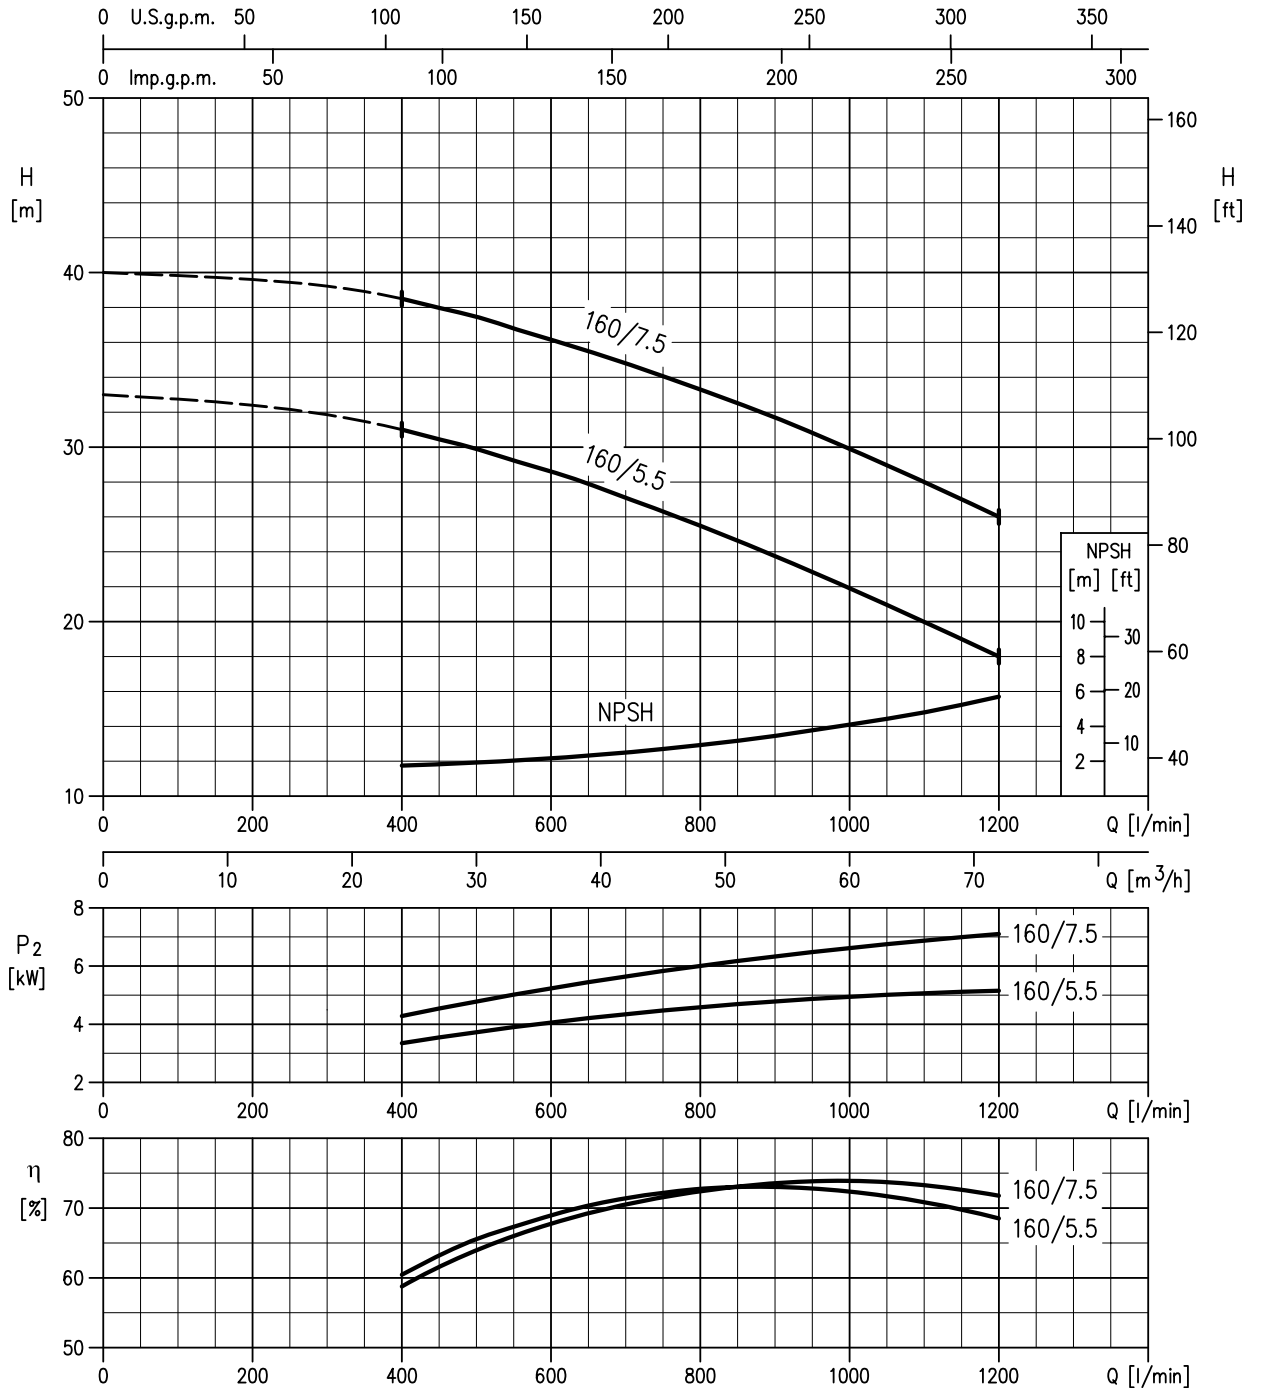

Rotation speed ≈ 2900 min<sup>-1</sup>  
 Test standard: ISO 9906:2012 - Grade 3B



50-200/9.2 (9.2kW) MEI > 0.70 – impeller diameter = 191 mm  
 50-200/11 (11kW) MEI > 0.70 – impeller diameter = 200 mm  
 50-200/15 (15kW) MEI > 0.40 – impeller diameter = 224 mm

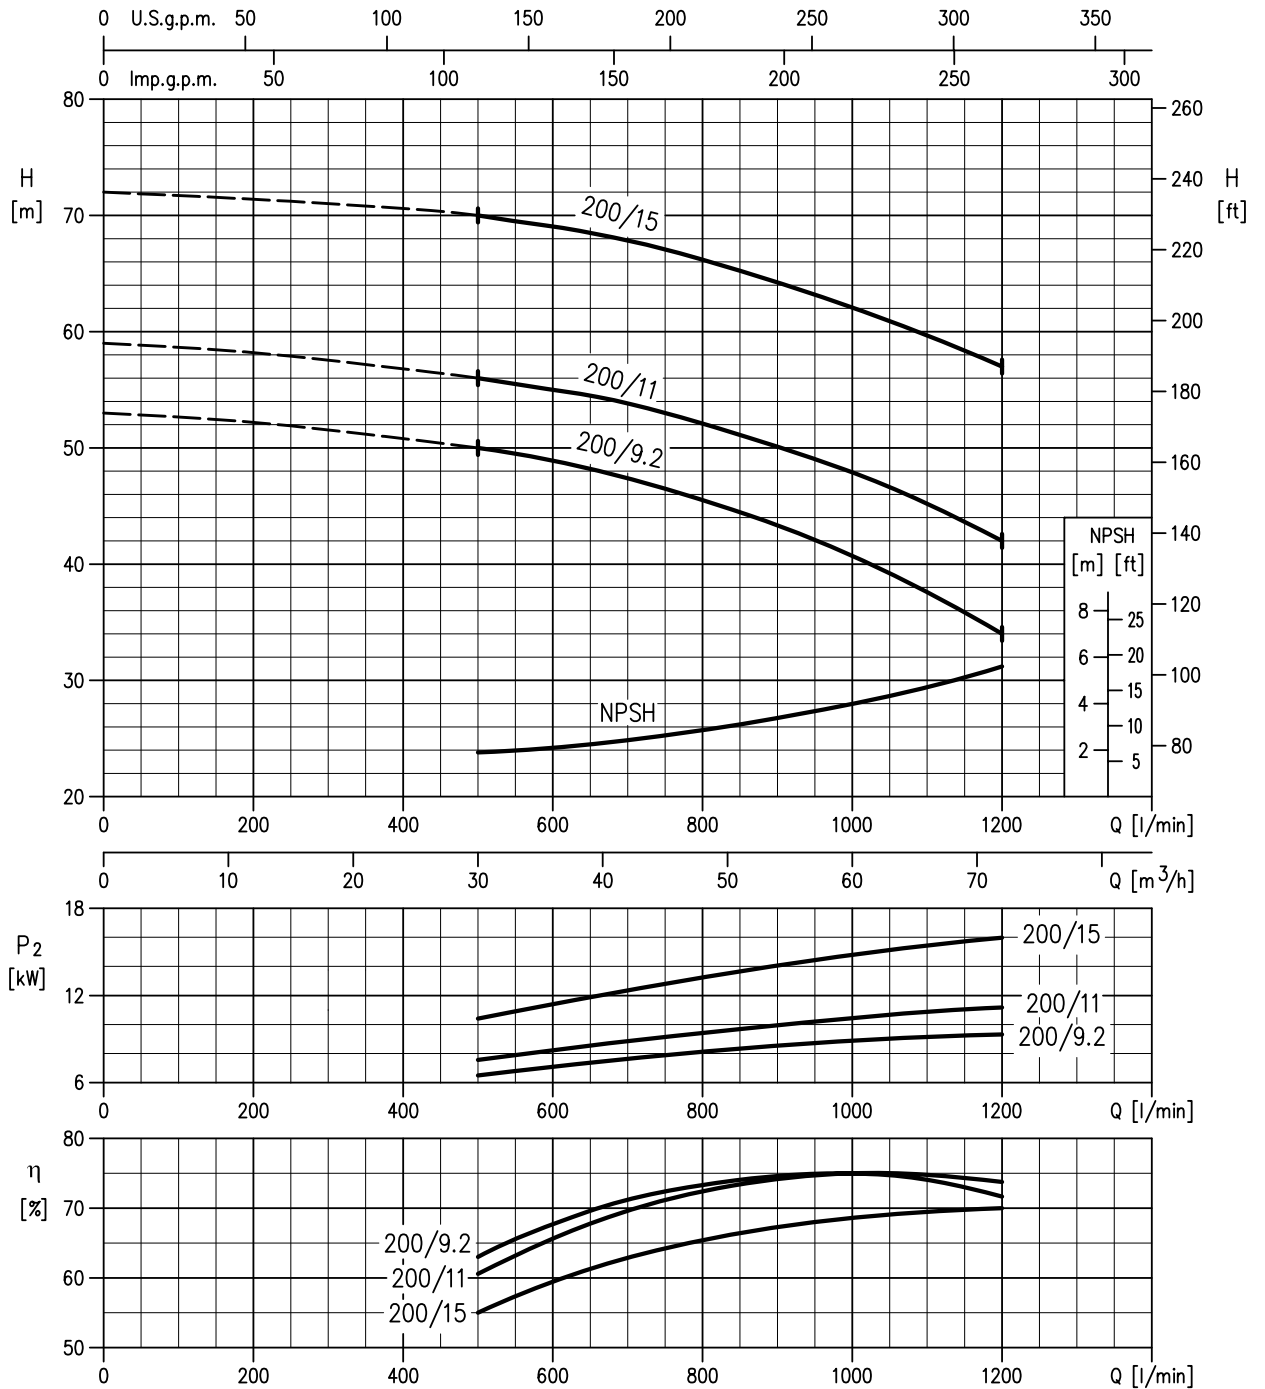


Rotation speed ≈ 2900 min<sup>-1</sup>  
 Test standard: ISO 9906:2012 - Grade 3B

PERFORMANCE CURVE

50Hz

Rev. V

65-125/4 (4.0kW) MEI > 0.50 – impeller diameter = 128 mm  
 65-125/5.5 (5.5kW) MEI > 0.50 – impeller diameter = 138 mm  
 65-125/7.5 (7.5kW) MEI > 0.50 – impeller diameter = 149 mm

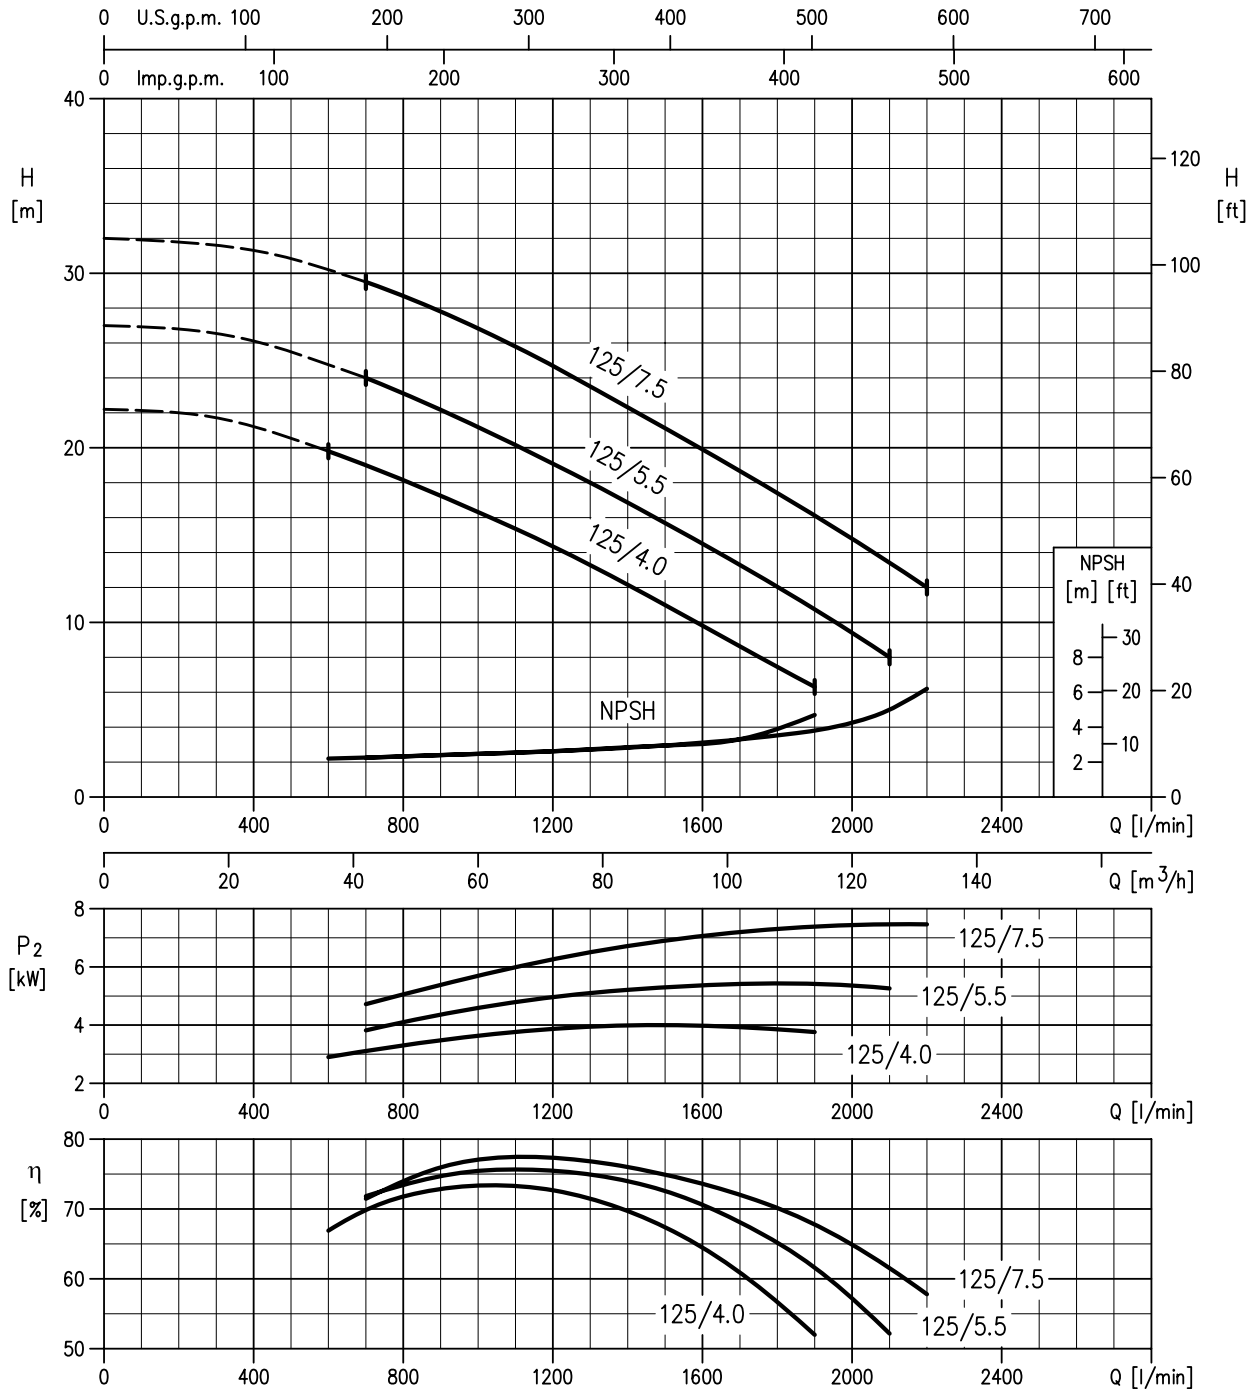


Rotation speed ≈ 2900 min<sup>-1</sup>  
 Test standard: ISO 9906:2012 - Grade 3B

PERFORMANCE CURVE

50Hz

Rev. V


65-160/7.5 (7.5kW) MEI > 0.70 – impeller diameter = 153 mm  
 65-160/9.2 (9.2kW) MEI > 0.70 – impeller diameter = 161 mm  
 65-160/11 (11kW) MEI > 0.70 – impeller diameter = 168 mm  
 65-160/15 (15kW) MEI > 0.70 – impeller diameter = 178 mm

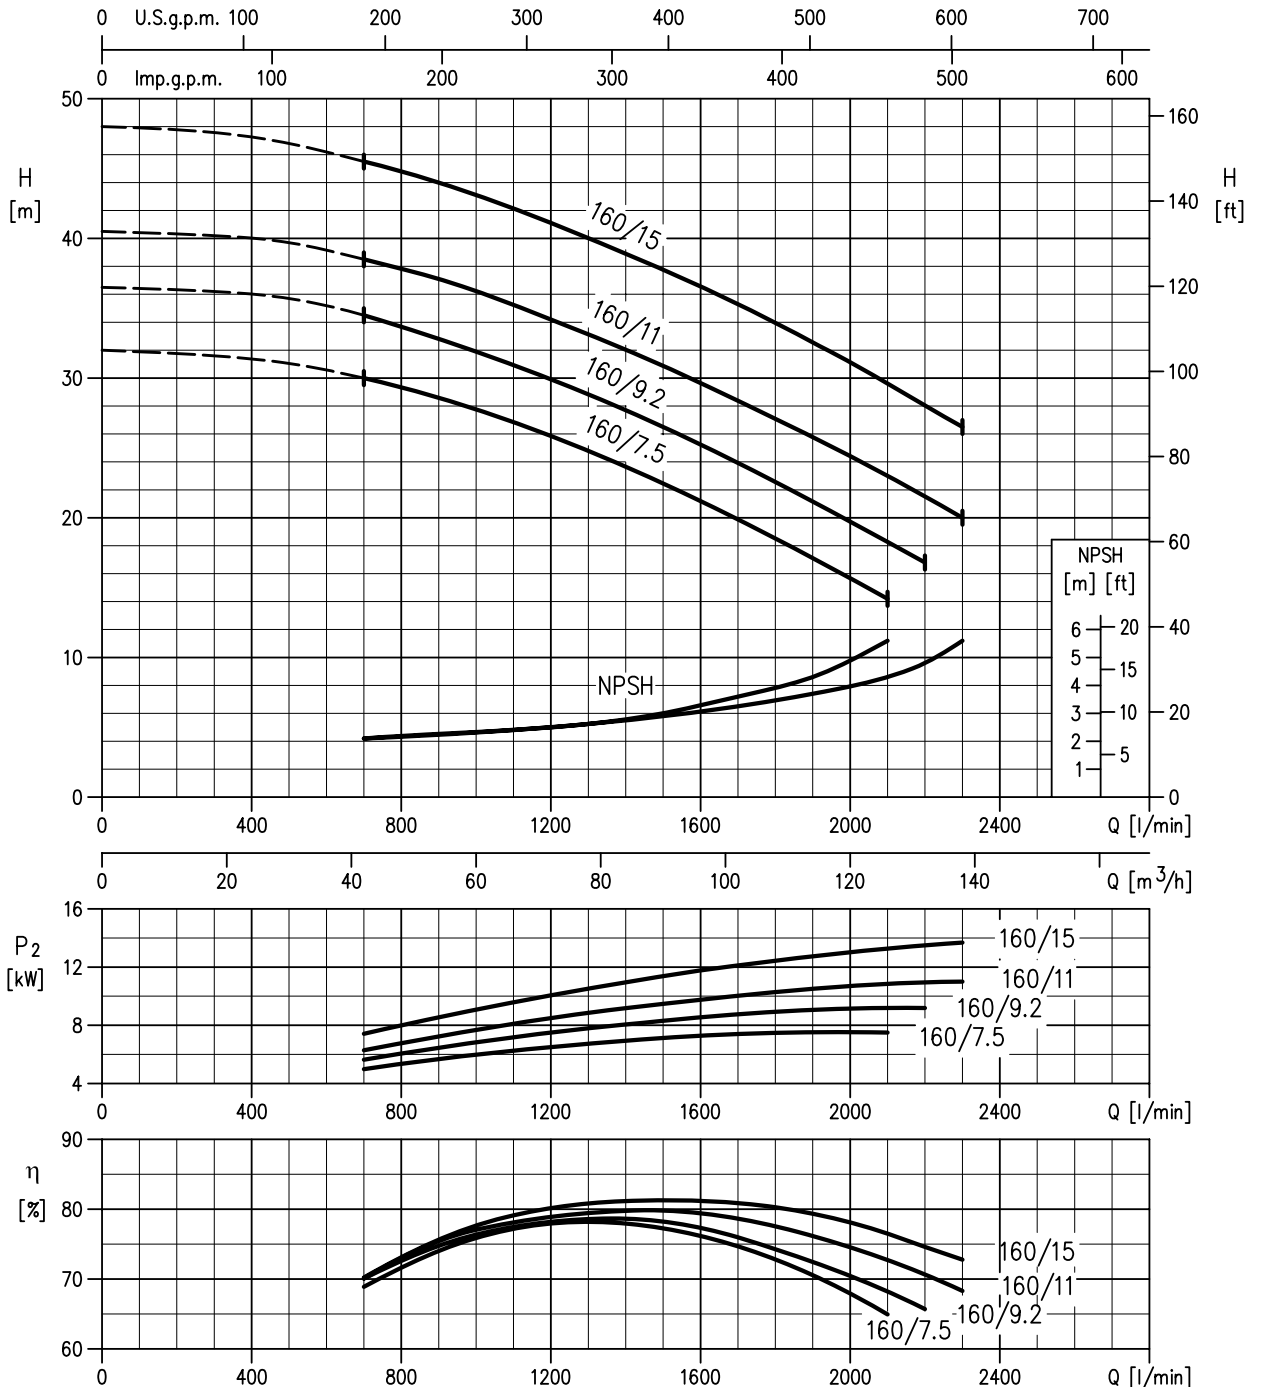

Rotation speed ≈ 2900 min<sup>-1</sup>


Test standard: ISO 9906:2012 - Grade 3B

65-200/15 (15kW) MEI > 0.70 – impeller diameter = 190 mm  
 65-200/18.5 (18.5kW) MEI > 0.70 – impeller diameter = 201 mm  
 65-200/22 (22kW) MEI > 0.70 – impeller diameter = 212 mm

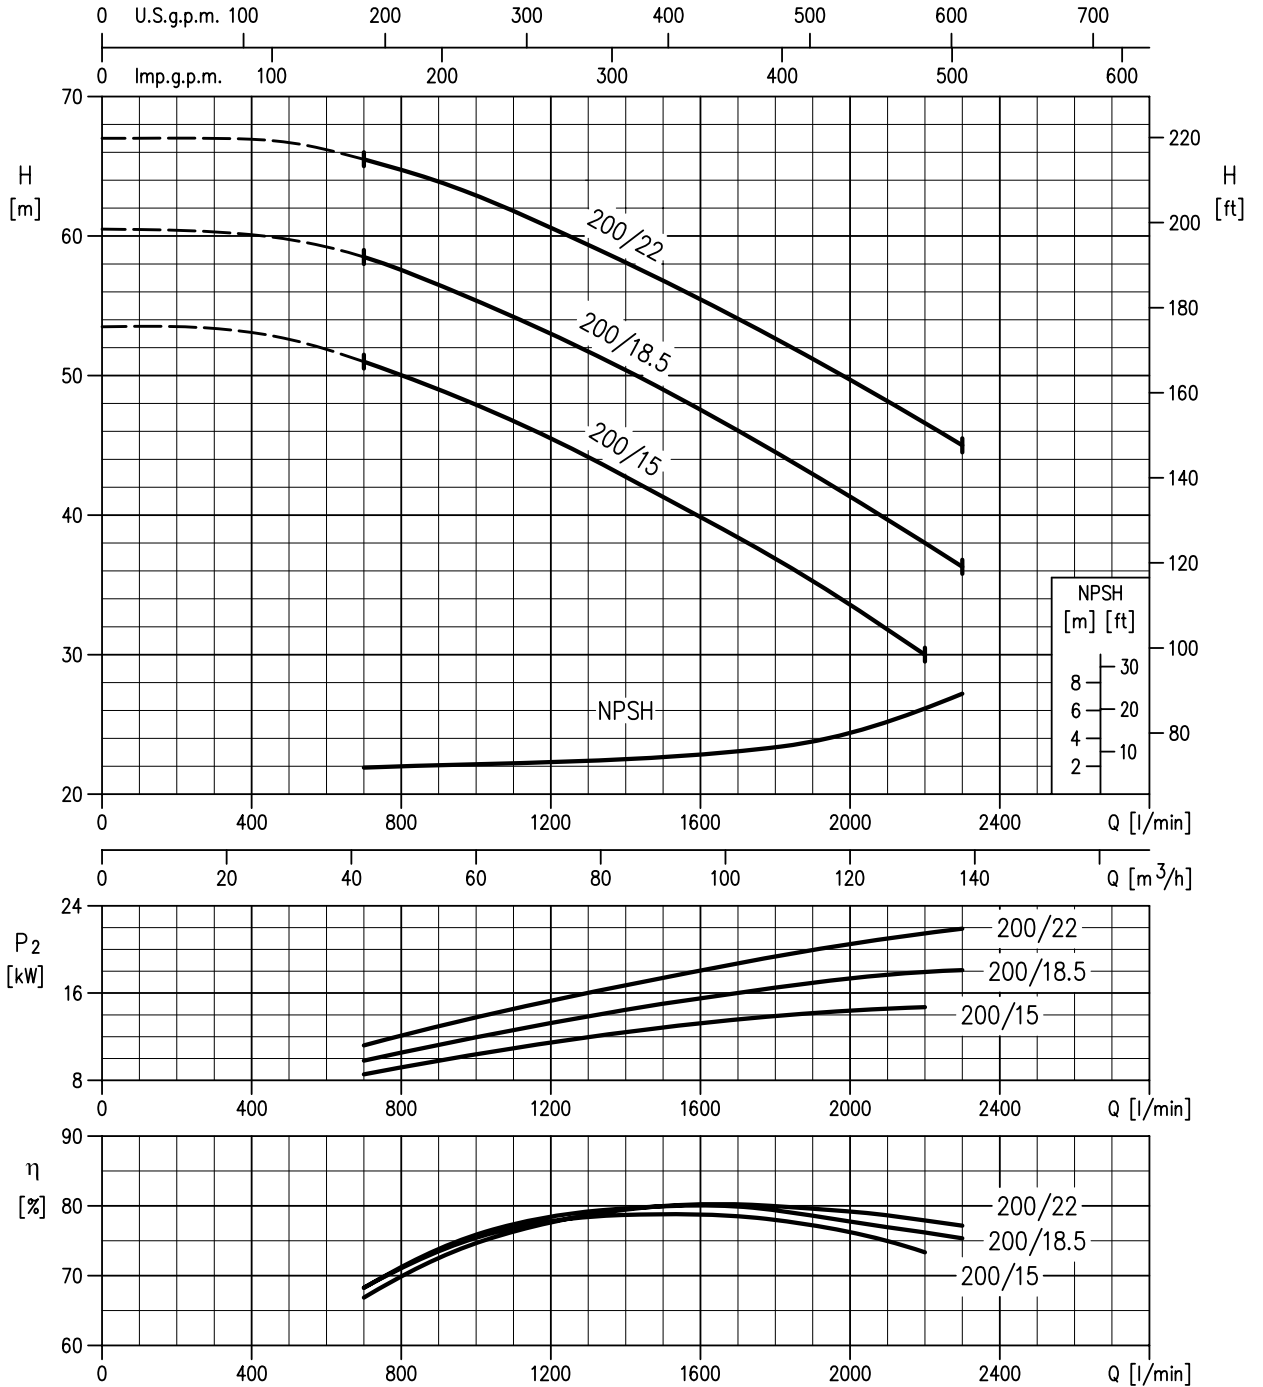


Rotation speed ≈ 2900 min<sup>-1</sup>  
 Test standard: ISO 9906:2012 - Grade 3B

65-250/30 (30kW) MEI > 0.70 – impeller diameter = 235 mm  
 65-250/37 (37kW) MEI > 0.70 – impeller diameter = 250 mm

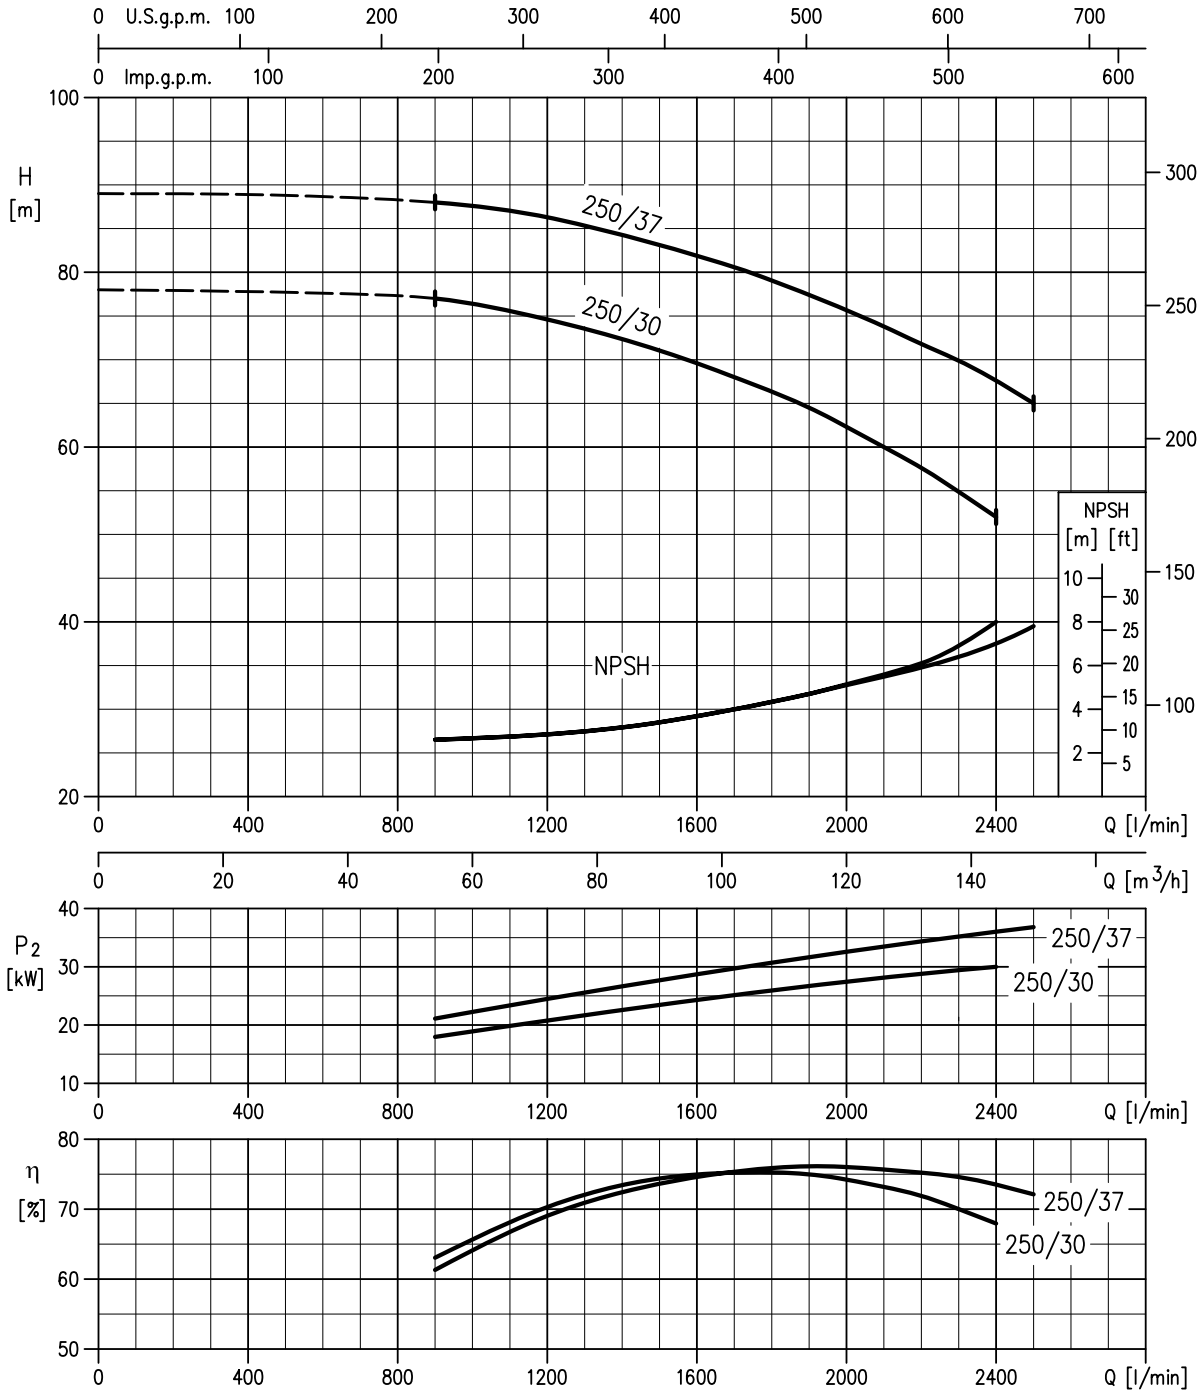


Rotation speed ≈ 2900 min<sup>-1</sup>  
 Test standard: ISO 9906:2012 - Grade 3B

80-160/11 (11kW) MEI > 0.70 – impeller diameter = 154 mm  
 80-160/15R (15kW) MEI > 0.70 – impeller diameter = 160 mm  
 80-160/15 (15kW) MEI > 0.70 – impeller diameter = 165 mm  
 80-160/18.5 (18.5kW) MEI > 0.70 – impeller diameter = 174 mm

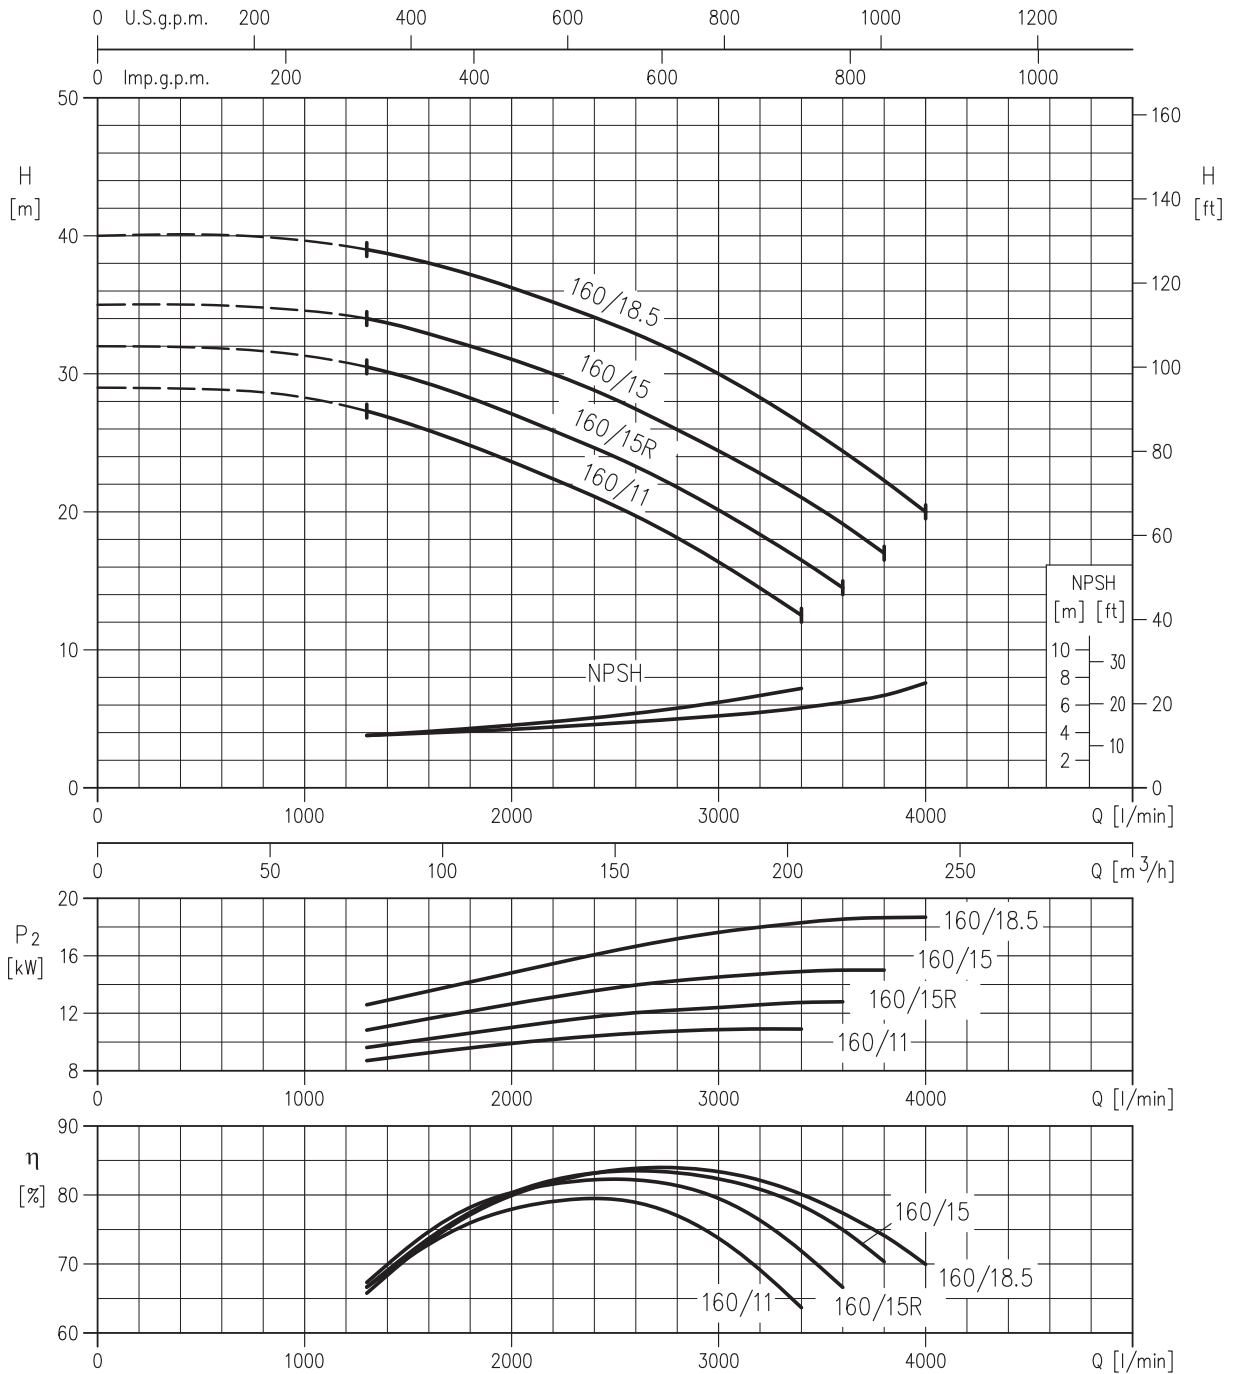

Rotation speed ≈ 2900 min<sup>-1</sup>  
 Test standard: ISO 9906:2012 - Grade 3B

80-200/22 (22kW) MEI > 0.60 – impeller diameter = 196 mm  
 80-200/30 (30kW) MEI > 0.60 – impeller diameter = 211 mm  
 80-200/37 (37kW) MEI > 0.60 – impeller diameter = 219 mm

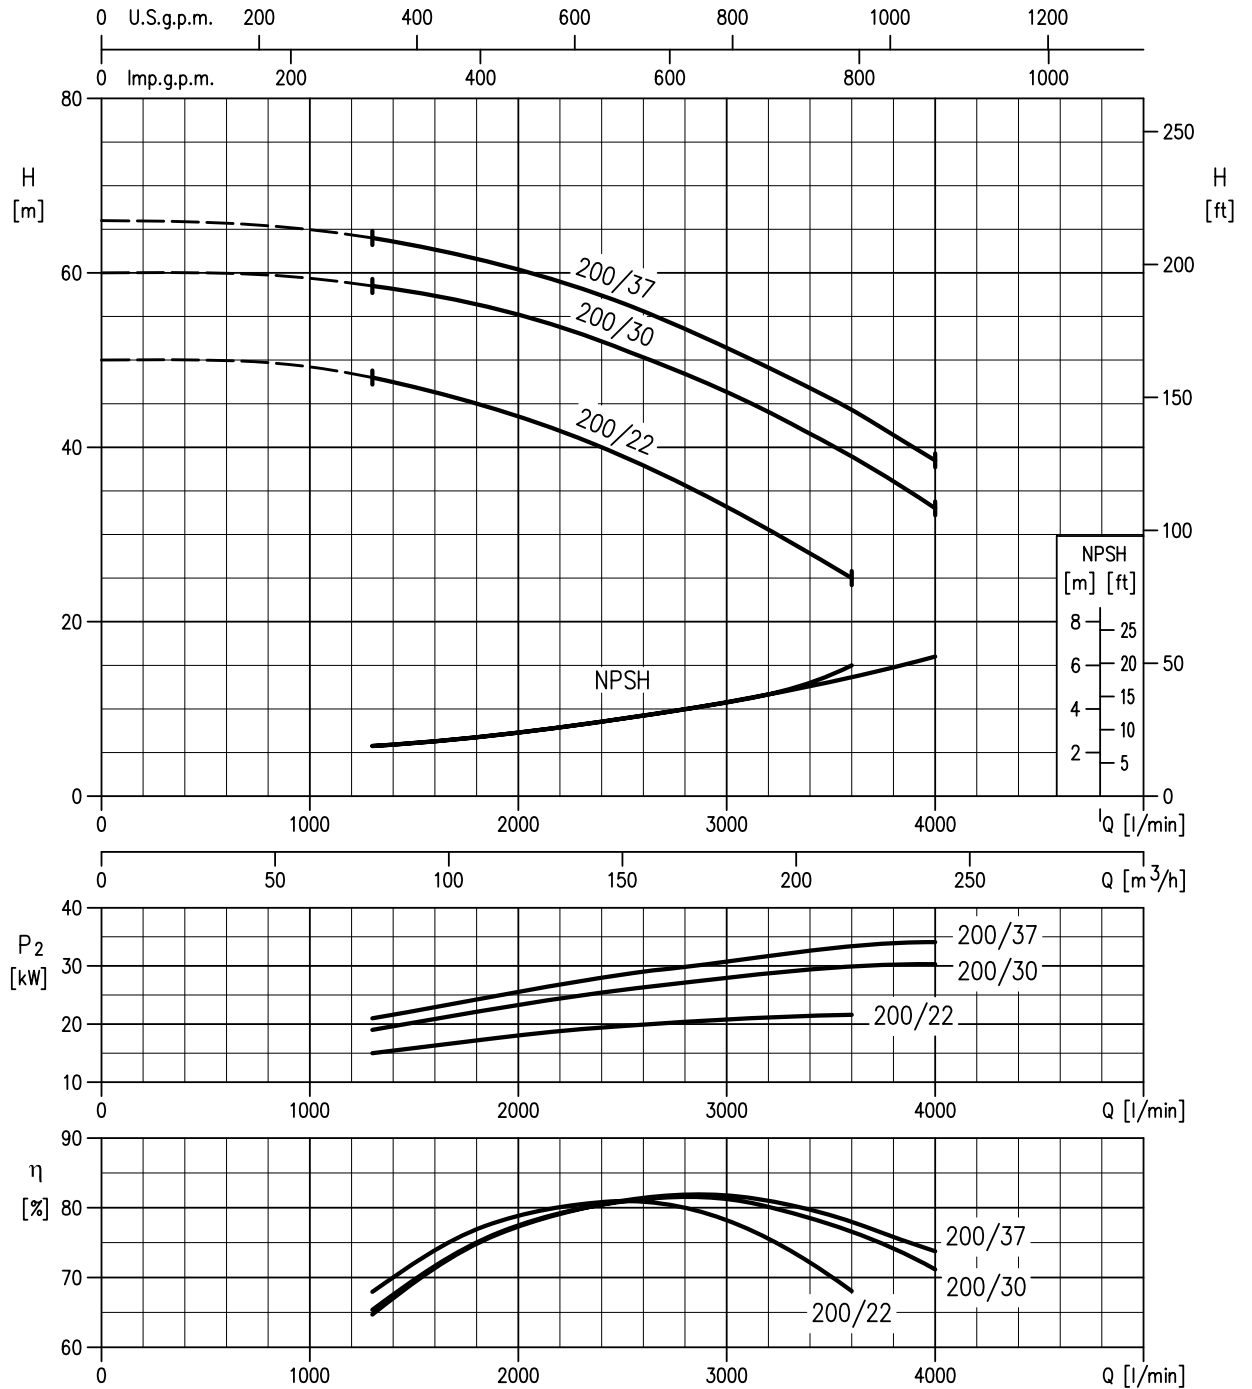


Rotation speed ≈ 2900 min<sup>-1</sup>  
 Test standard: ISO 9906:2012 - Grade 3B

PERFORMANCE CURVE

50Hz

Rev. V

80-250/37 (37kW) MEI > 0.60 – impeller diameter = 230 mm  
 80-250/45 (45kW) MEI > 0.60 – impeller diameter = 245 mm  
 80-250/55 (55kW) MEI > 0.60 – impeller diameter = 259 mm

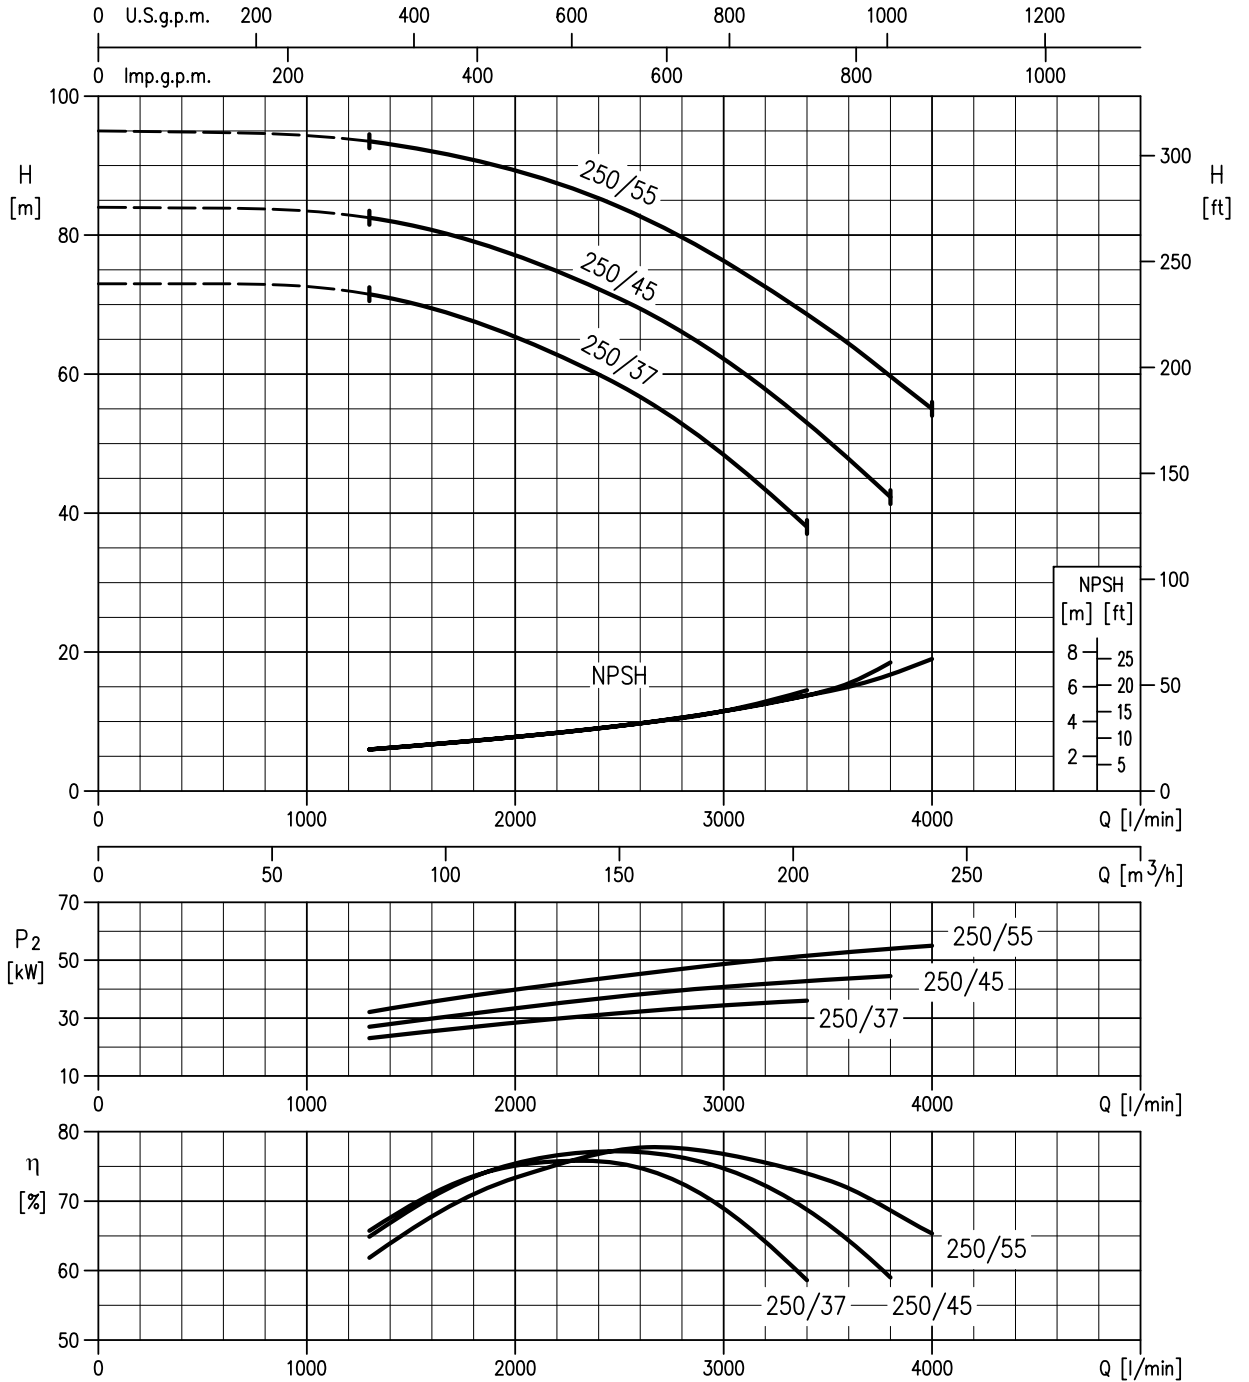

Rotation speed ≈ 2900 min<sup>-1</sup>  
 Test standard: ISO 9906:2012 - Grade 3B