



2CDX 70/10 (0.75 kW) - Impeller diameter = 132/132 mm  
 2CDX 70/12 (0.9 kW) - Impeller diameter = 153/132 mm  
 2CDX 70/15 (1.1 kW) - Impeller diameter = 153/153 mm  
 2CDX 70/20 (1.5 kW) - Impeller diameter = 153/176 mm

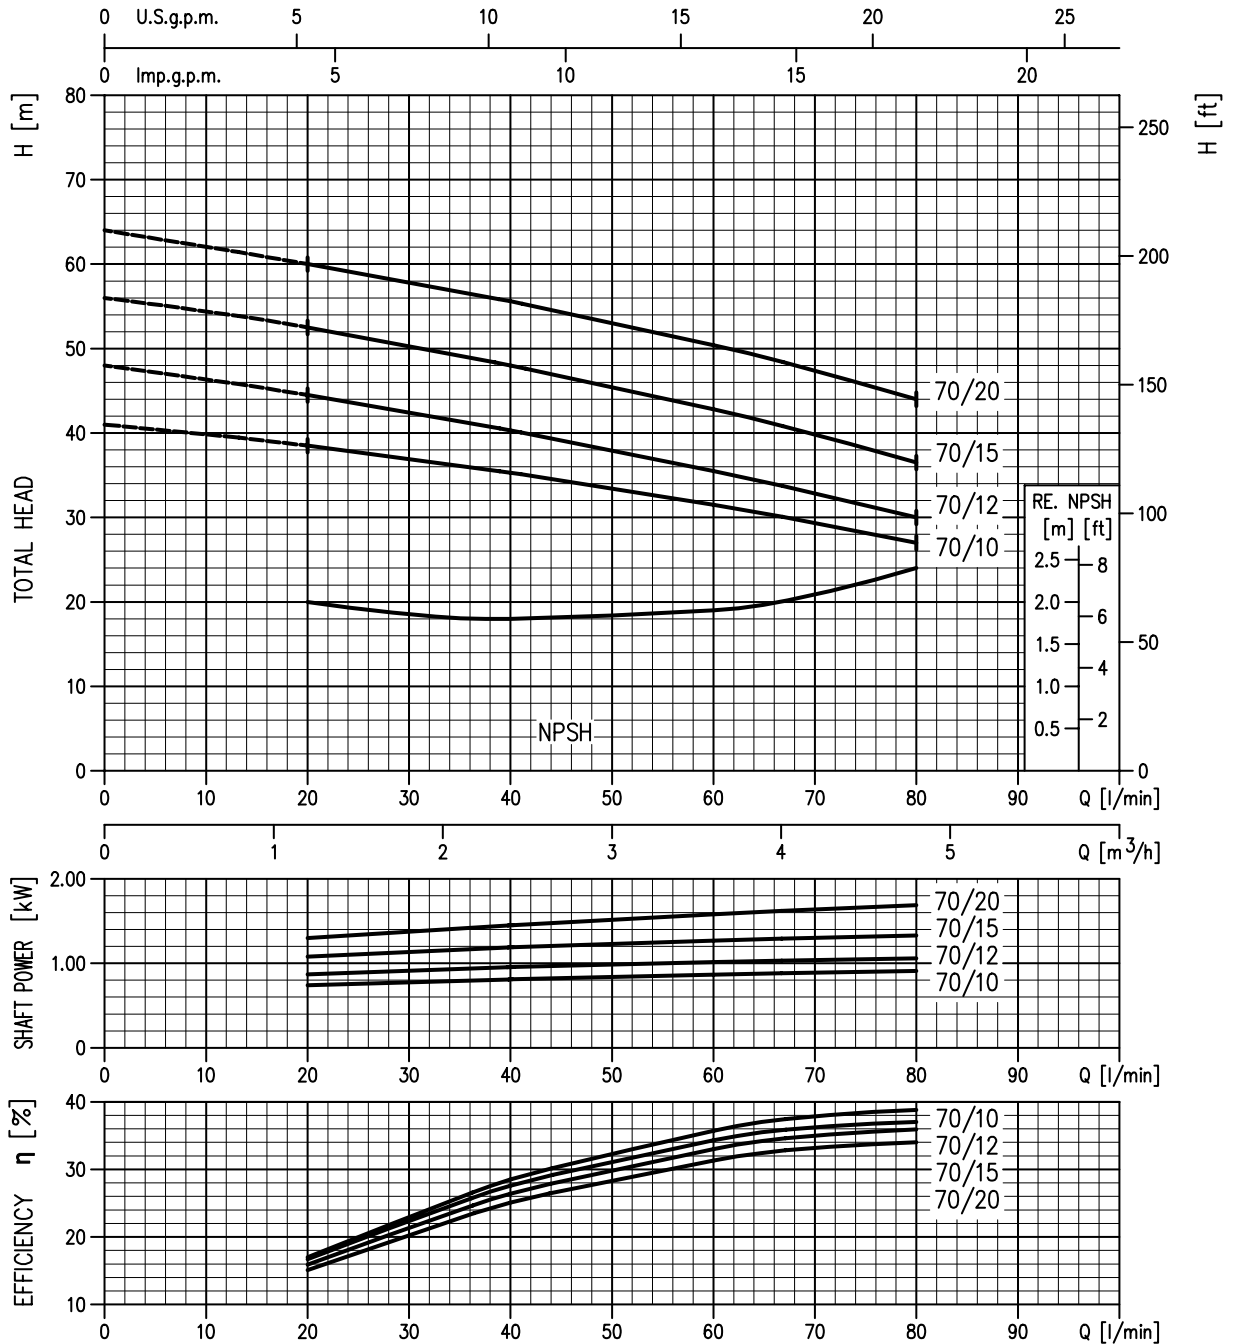


Rotation speed ≈ 2800 min<sup>-1</sup>  
 Test standard: ISO 9906:2012 - Grade 3B

2CDX 120/15 (1.1 kW) - Impeller diameter = 132/132 mm  
 2CDX 120/20 (1.5 kW) - Impeller diameter = 157/132 mm  
 2CDX 120/30 (2.2 kW) - Impeller diameter = 157/157 mm  
 2CDX 120/40 (3.0 kW) - Impeller diameter = 176/157 mm

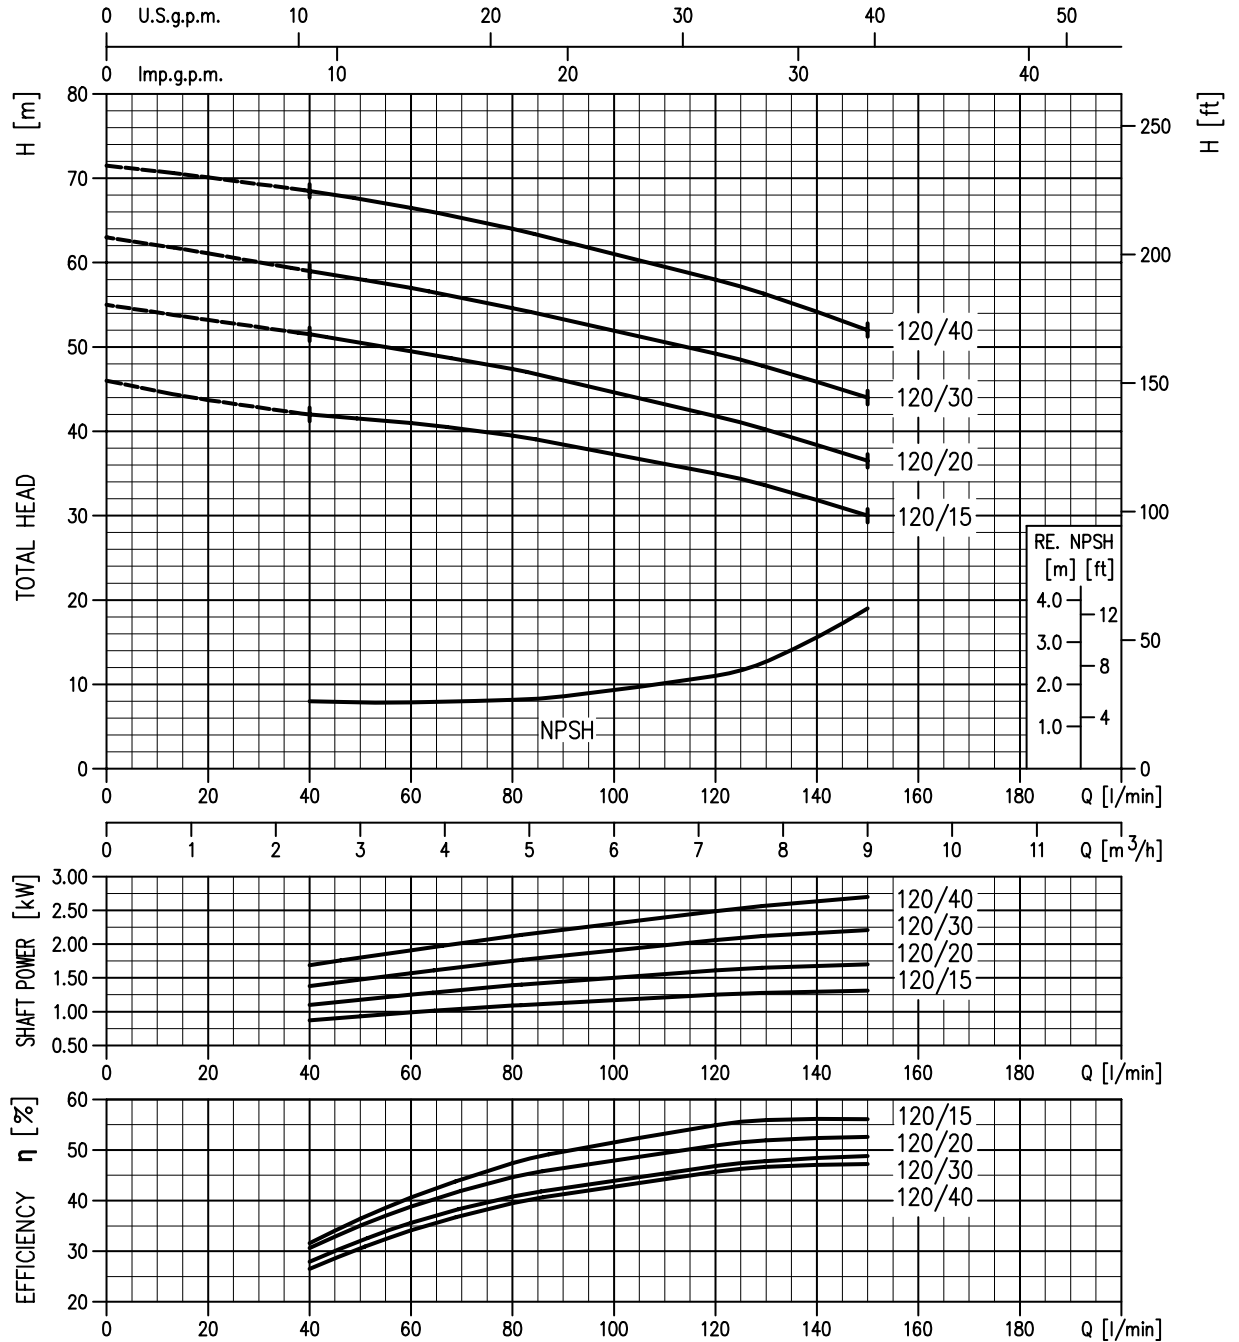

Rotation speed  $\approx 2800 \text{ min}^{-1}$   
 Test standard: ISO 9906:2012 - Grade 3B

2CDX 200/30 (2.2 kW) - Impeller diameter = 157/132 mm  
 2CDX 200/40 (3.0 kW) - Impeller diameter = 157/157 mm  
 2CDX 200/50 (3.7 kW) - Impeller diameter = 176/157 mm

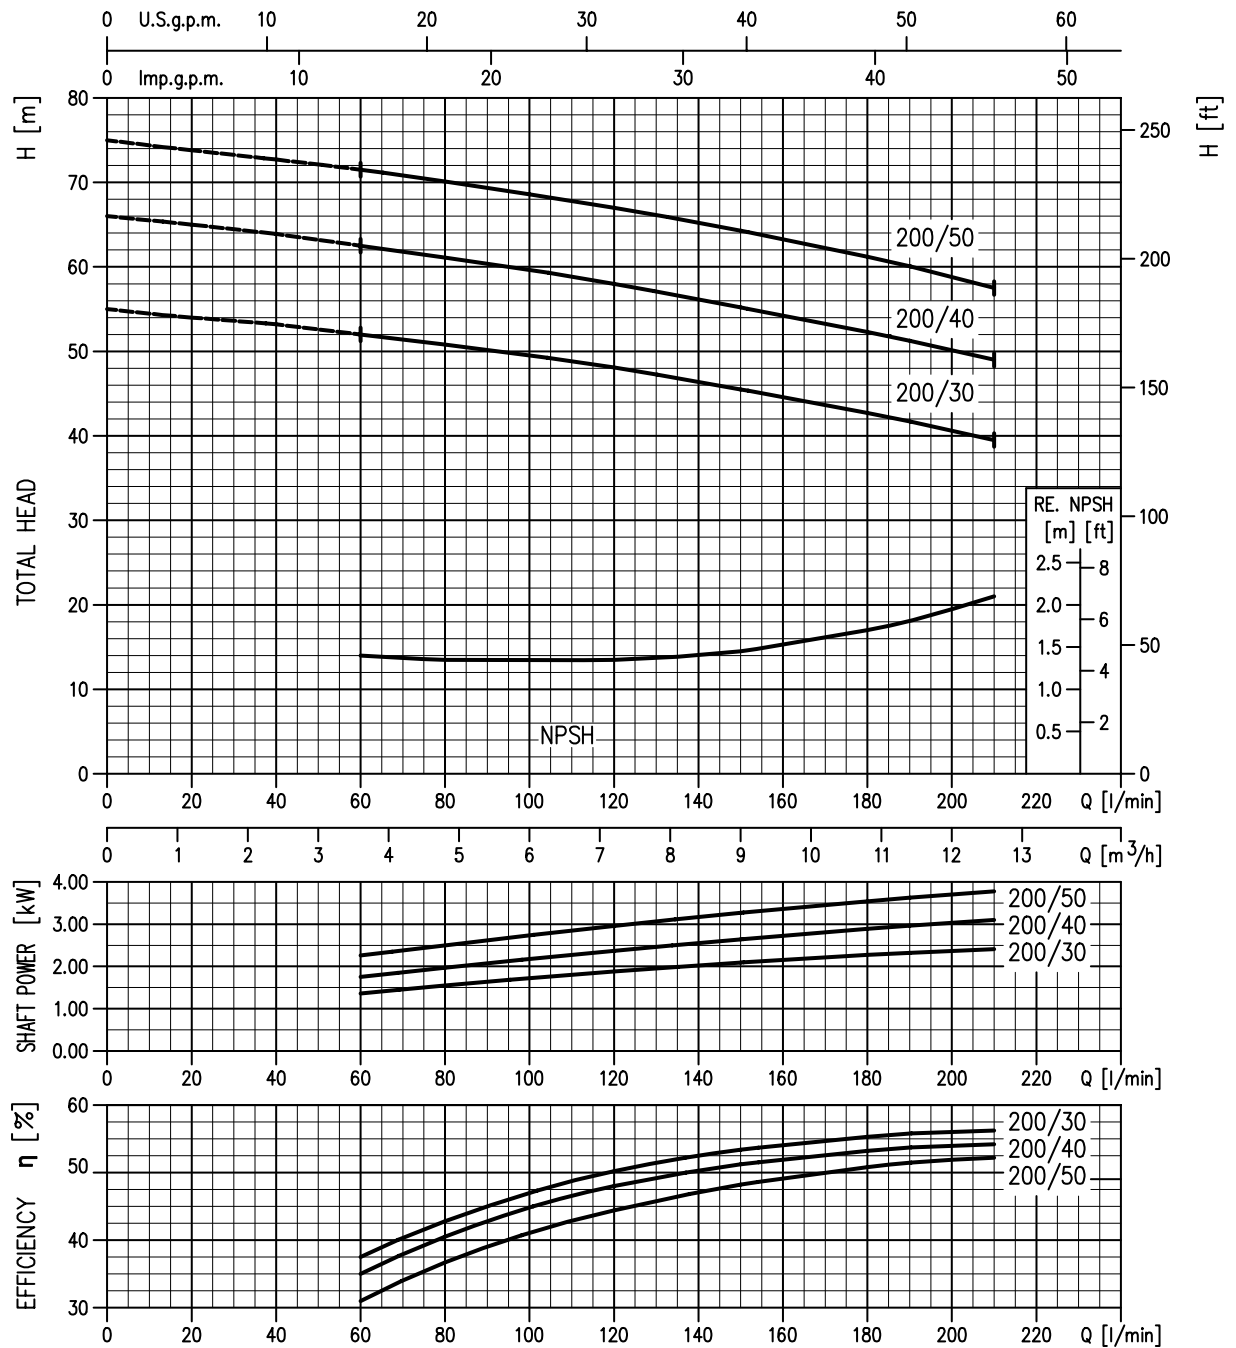

Rotation speed ≈ 2800 min<sup>-1</sup>  
 Test standard: ISO 9906:2012 - Grade 3B