

DP/DPV

Drainage
Plastic



White water

Construction features

Pump body polypropylene



Impeller Noryl®

Mechanical seal double lip seal

Motor shaft stainless steel AISI 416 with ceramic bush

Free passage
 \varnothing max 4 mm (DP 40/60)
 \varnothing max 7 mm (DP 80/100)
 \varnothing max 15 mm (DPV)

Max submergence max 5 m

Liquid temperature 0 - 40 °C

Cable H05 RN8F, 10 m

G float switch

Motor

1~ 1x220V - 60H
(with thermal protection)

2 Poles induction motor


3~ 3x380V - 60Hz
(DPV 80/100)

Insulation class F

Protection degree IPX8

1~ 110V - 60Hz	
TYPE	I (A)
DP 40	2,0
DP 60	4,2
DP 80	7,4
DP 100	10,2
DPV 80	5,2
DPV 100	7,6

TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
DP40-60	80x120x175	135	80x120x205	162
DP 80-100	80x120x145	57	80x120x190	76
DPV 80-100	80x120x145	57	80x120x190	76




DP



DPV



DP/DPV

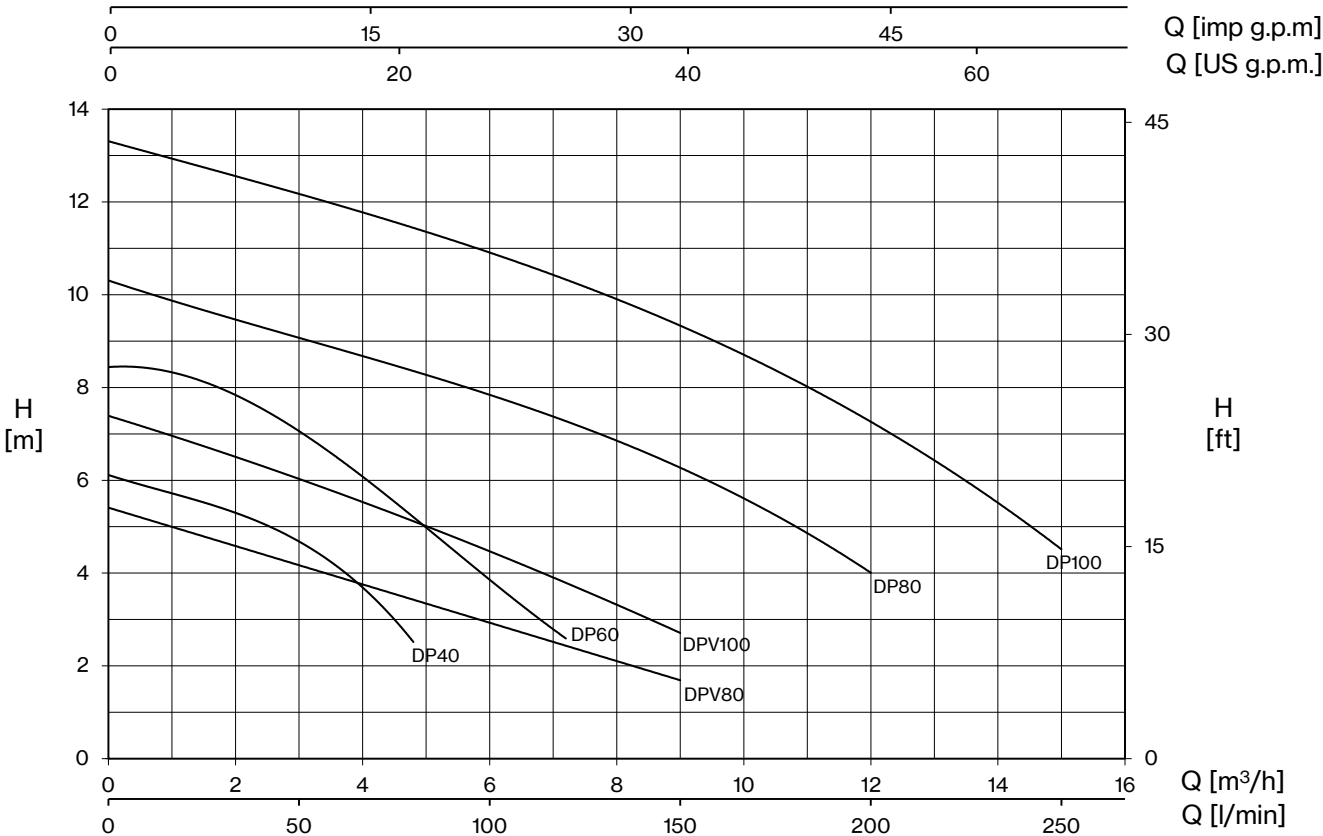




TYPE		W	AMPERE		Q (m³/h - l/min)											
1~	3~		1~	3~	0	1,2	2,4	3	3,6	4,8	6	7,2	9	12	15	
					0	20	40	50	60	80	100	120	150	200	250	
		1x220 V 60 Hz		3x380 V 60 Hz		H (m)										
DP 40 (G)	-	200	1	-	6,1	5,7	5,0	4,7	4,2	2,5						
DP 60 (G)	-	400	2,1	-	8,5	8,1	7,6	7,2	6,7	5,0	3,9	2,6				
DP 80 (G)	DPT 80	800	3,7	1,8	10,3			9,1	8,8	8,3	7,8	7,3	6,3	4,0		
DP 100 (G)	DPT 100	1050	5,1	2,3	13,3			12,2	12,0	11,5	10,9	10,3	9,3	7,3	4,5	


TYPE		W	AMPERE		Q (m³/h - l/min)				
1~	3~		1~	3~	0	3	6	9	
					0	50	100	150	
		1x220 V 60 Hz		3x380 V 60 Hz		H (m)			
DPV 80 (G)	DPVT 80	500	2,6	1,2	5,4	4,2	2,9	1,7	
DPV 100 (G)	DPVT 100	750	3,8	1,7	7,4	5,8	4,7	2,7	





DP/DPV

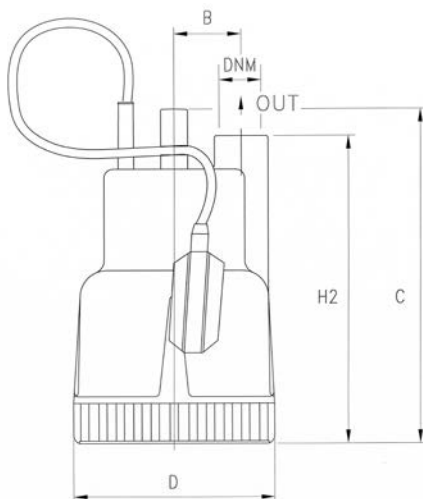

TYPE	DIMENSIONS (mm)								
	B	C	D	H2	DNM	I	L	M	
DP 40 (G)	50	250	150	230	1" G	170	200	320	5
DP 60 (G)	50	250	150	230	1" G	170	200	320	6,5
DP 80 (G)	55.5	296	176	276	1" ¼ G	185	230	310	8,5
DP 100 (G)	55.5	296	176	276	1" ¼ G	185	230	310	10

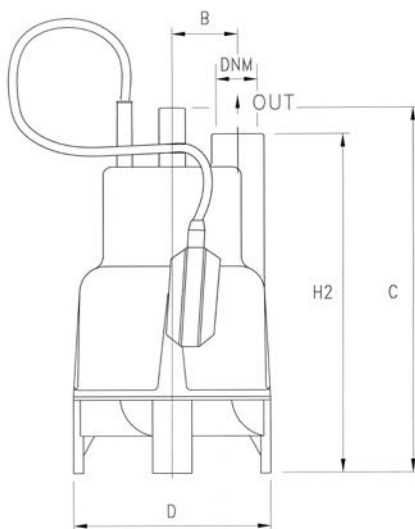

TYPE	DIMENSIONS (mm)								
	B	C	D	H2	DNM	I	L	M	
DPV 80 (G)	55.5	331	176	310	1" ¼ G	185	230	345	8,5
DPV 100 (G)	55.5	331	176	310	1" ¼ G	185	230	345	10

